


ATENIC 2024


Atenic GmbH
Lauchwasenstraße 1
76709 Kronau
Email: info@atenic.de


ATENIC all rights reserved
Designs and specifications may change without prior notice.

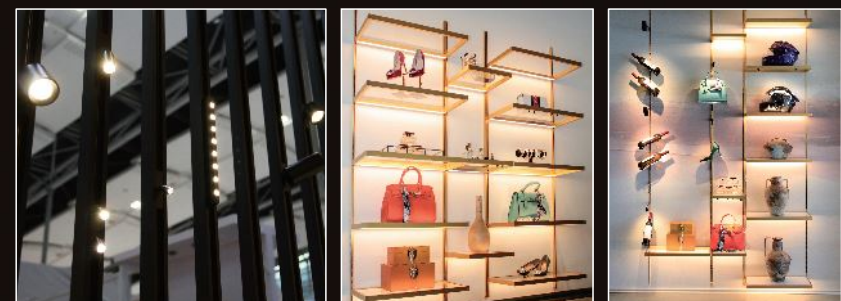

24V- 48VDC LOW VOLTAGE TRACK SYSTEM



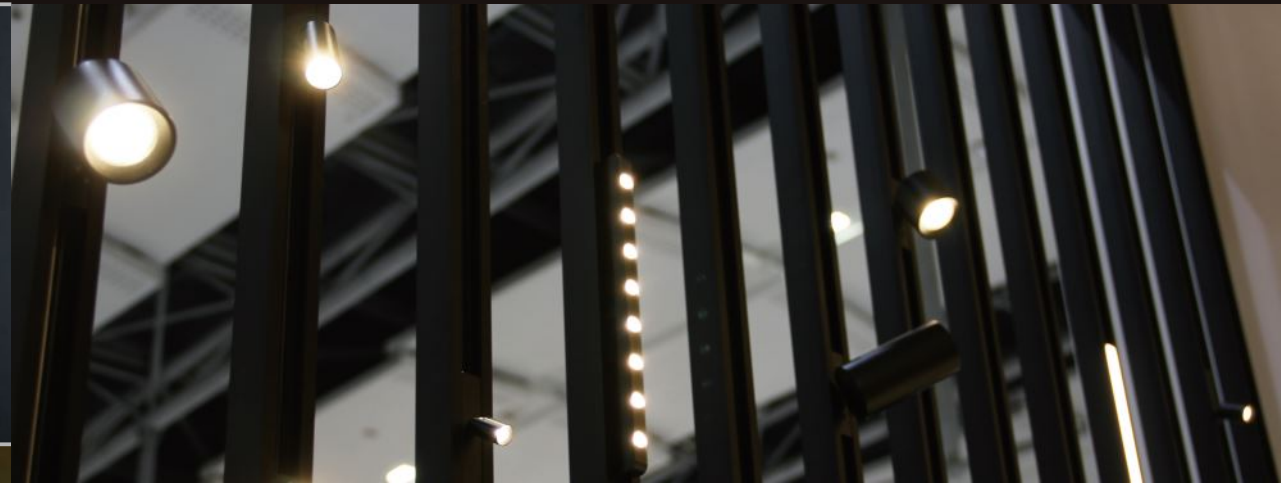

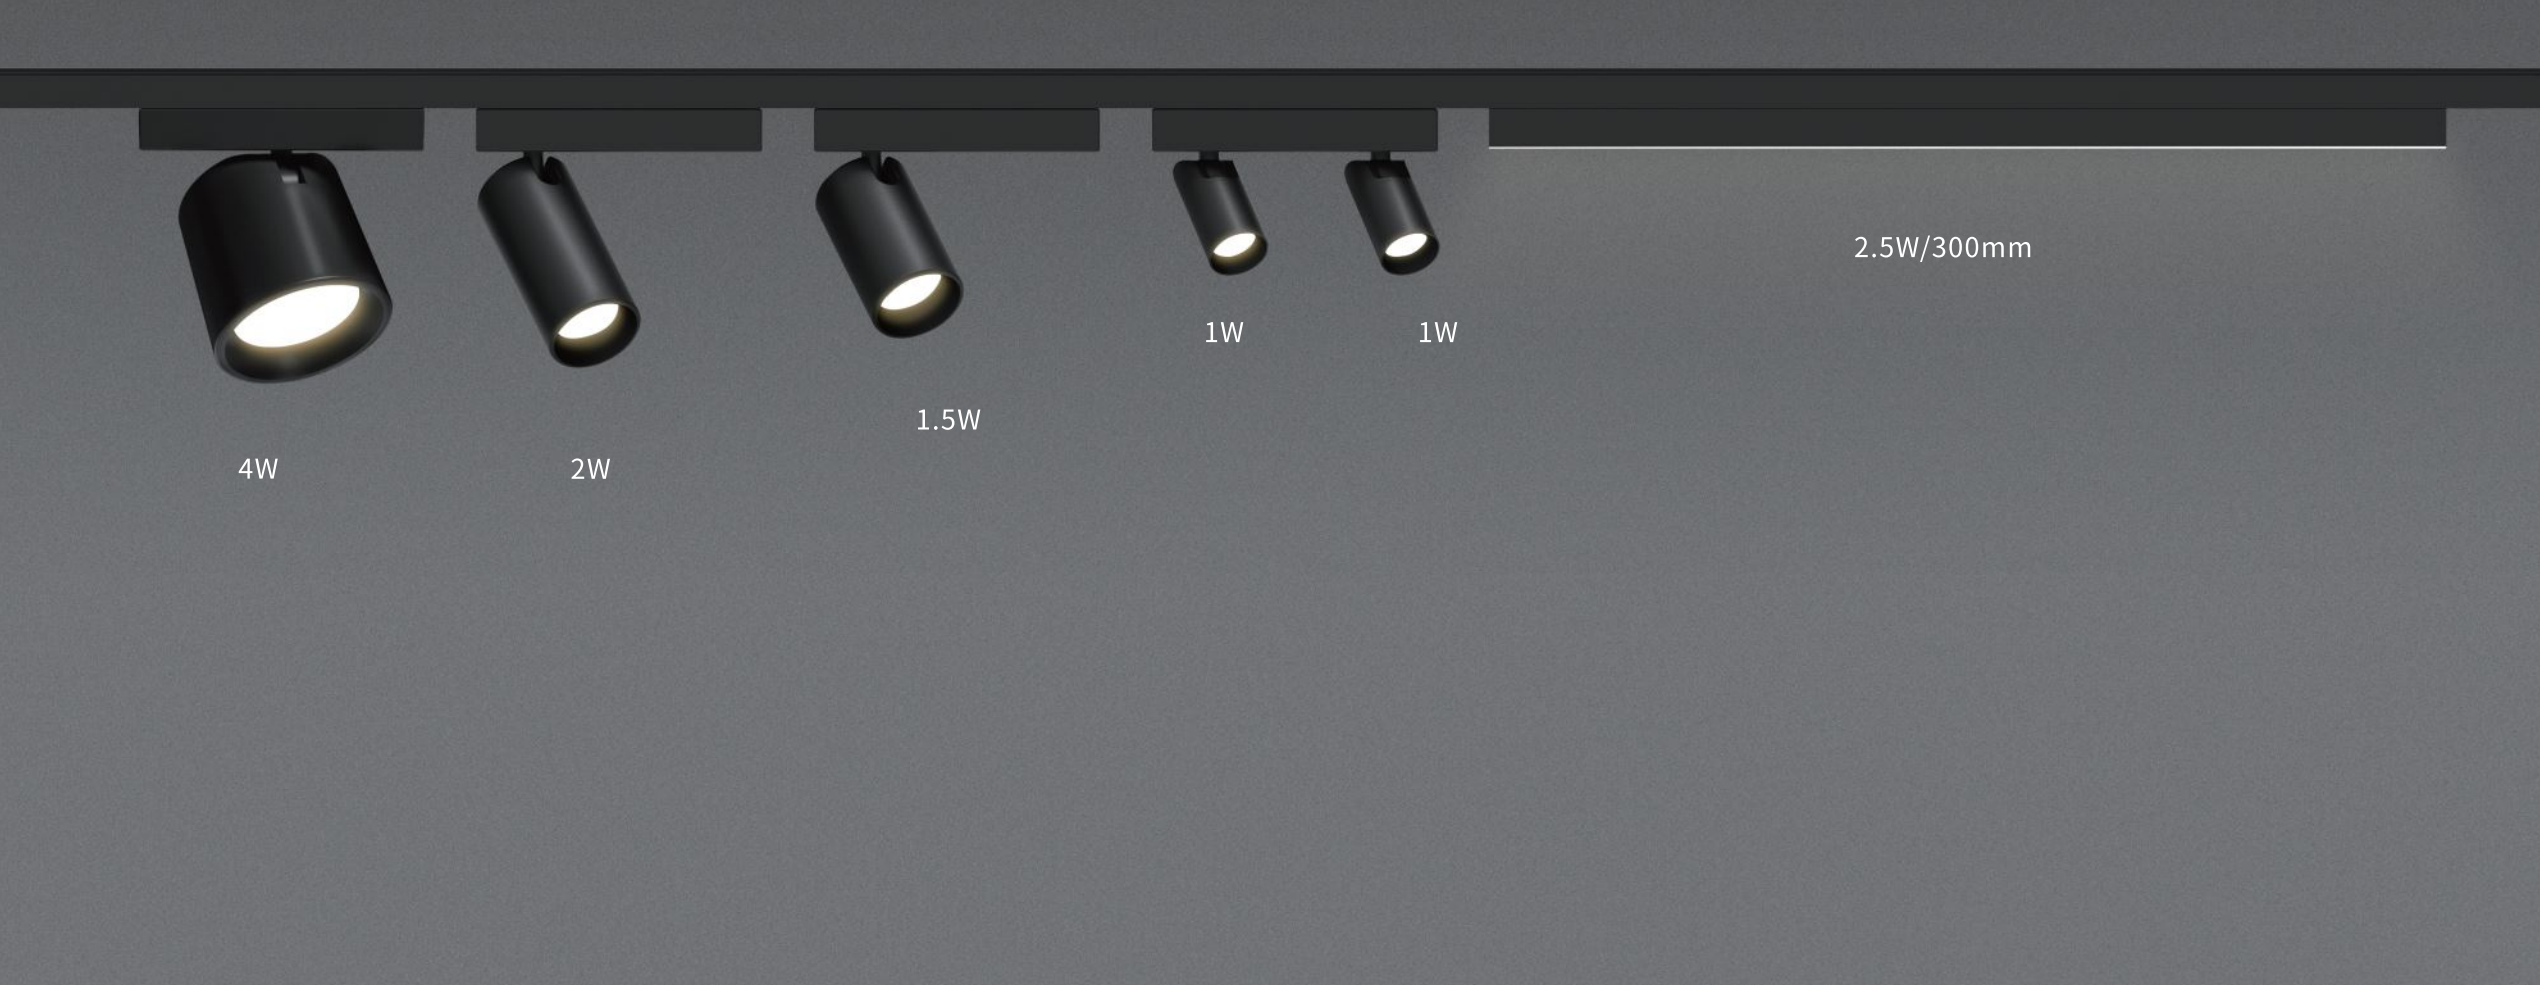

Track Linear Lily

Super Slim track linear light with low power track

Endless extends without dark area

Input voltage: DC24-48V

Power: 2.5W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: ≥ 90 , ≥ 95

Dimming: 0-10V/PWM/DALI(optional)

Beam Angle: 110°



Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W



无暗区连接
no dark area connection

适用于以下铝槽轨道
Suit for following power track

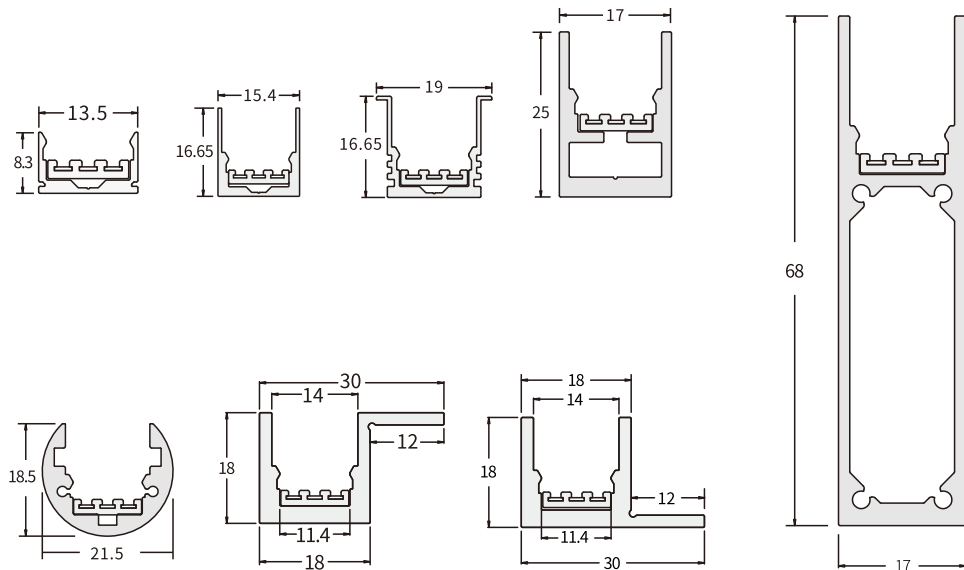

超薄纤细的线性外壳

无点光源,无暗区的线性连接设计

输入电压: 24V-48V

功率: 2.5W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: ≥ 90 , ≥ 95

发光角度: 110°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

Track Linear Lina

Super Slim track linear light with Asymmetric diffuser

Endless extends without dark area

Input voltage:DC24-48V

Power: 3W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: ≥ 90 , ≥ 95


Dimming: 0-10V/PWM/DALI(optional)

Beam Angle: 70°Asymmetrical

Working temperature: 0~45°C



we suggest maximum connected power
not more than 100W



70°Asymmetrical

超薄纤细的线性外壳设计,

偏光灯罩

可定制不同的长度

输入电压:DC24-48V

功率: 3W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: ≥ 90 , ≥ 95



调光方式: 0-10V/PWM/DALI(可选)

发光角度: 70° 偏光

工作温度: 0~45°C

我们建议最大连接功率不超过100W

适用于以下铝槽轨道
Suit for following power track

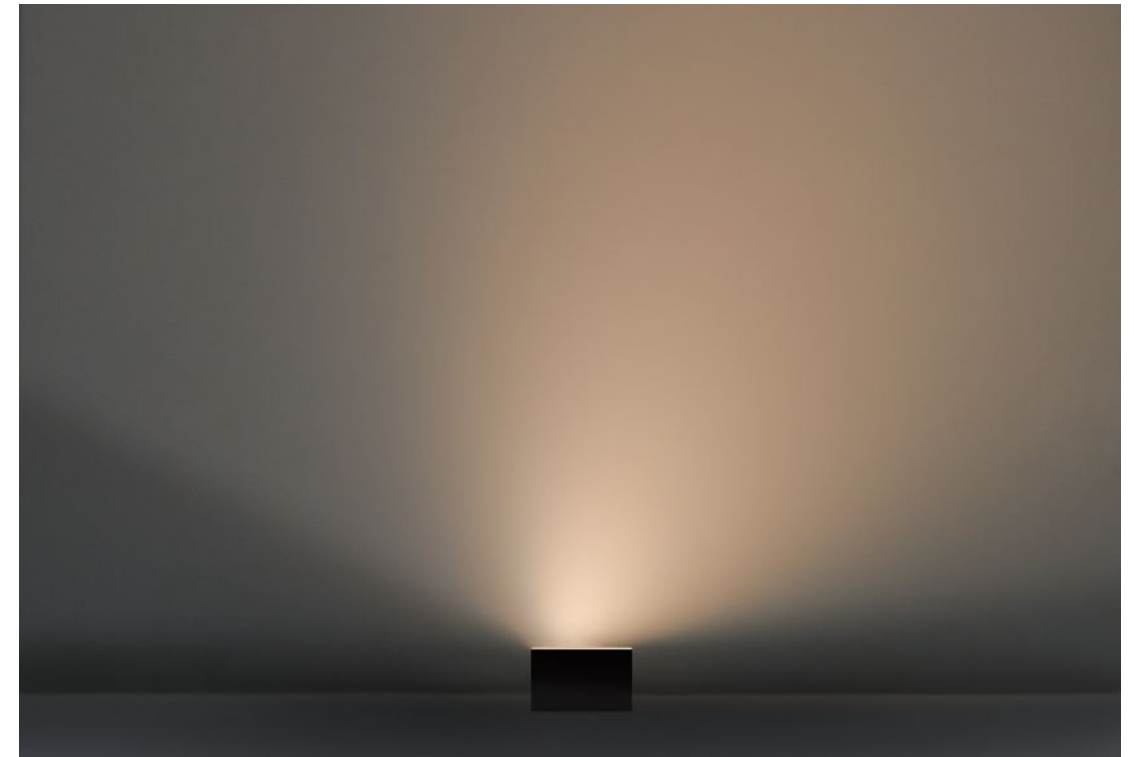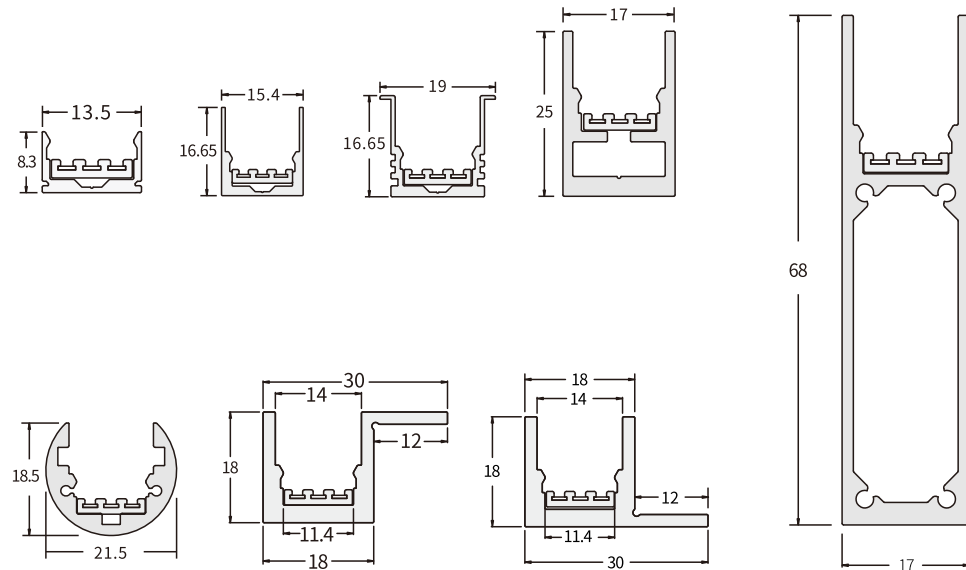

Track Optic Lino



Super Slim mini wall washer with low power track

Input voltage: DC24V

Power: 4W(300mm)/8W(590mm)/10W(890mm)/12W(1190mm)

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: Ra $\geq$ 90, $\geq$ 95

Dimming: 0-10V/PWM/DALI(optional)


Beam Angle: 15° /20°/25°/ 35°/50°

Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W



适用于以下铝槽轨道
Suit for following power track

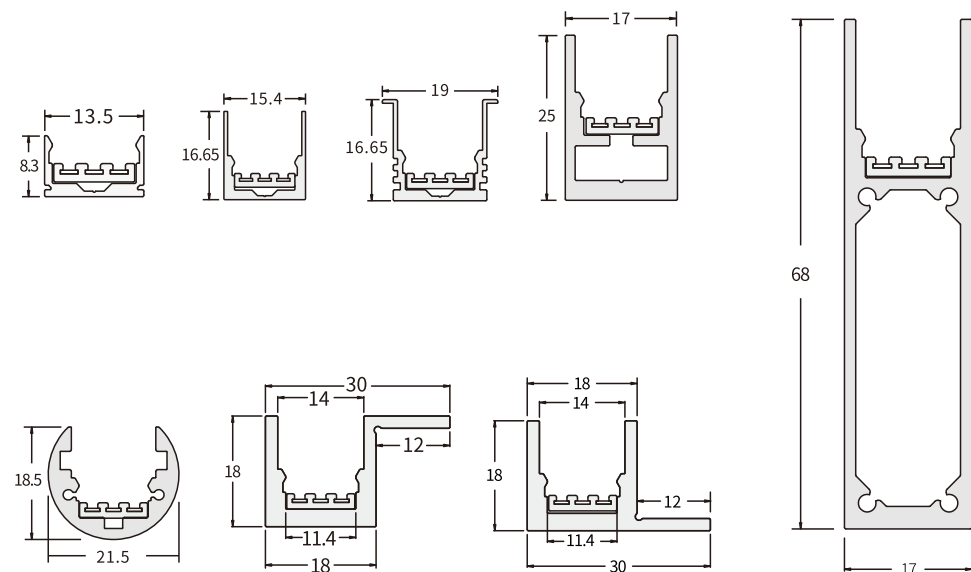

超级迷你轨道洗墙灯，
有多种不同的发光角度，
是细小空间内的理想照明

输入电压: DC24V

功率: 4W(300mm)/8W(590mm)/10W(890mm)/12W(1190mm)

颜色: 2700K/3000K/3500K/4000K/5000K/6500K


显色: Ra $\geq$ 90, $\geq$ 95

调光方式: 0-10V/PWM/DALI(可选)

发光角度: 15° /20°/25°/ 35°/50°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

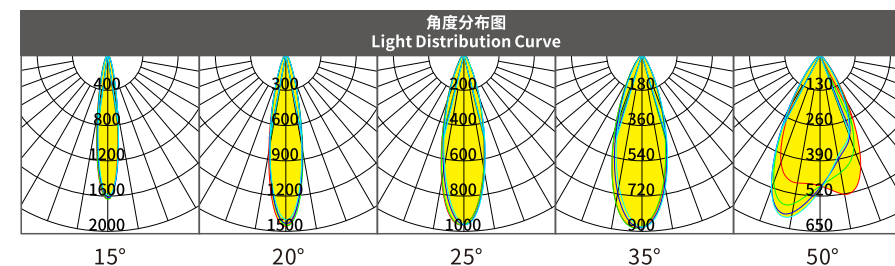

Track Optic Lino-G

Superslim mini with low power track
with different beam angle, Anti-glare design

Input voltage: DC24V

Power: 4W(300mm)/8W(590mm)/10W(890mm)/12W(1190mm)

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: Ra $\geq$ 90, $\geq$ 95


Dimming: 0-10V/PWM/DALI(optional)

Beam Angle: 15°/20°/25°/35°/50°

Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

适用于以下铝槽轨道
Suit for following power track

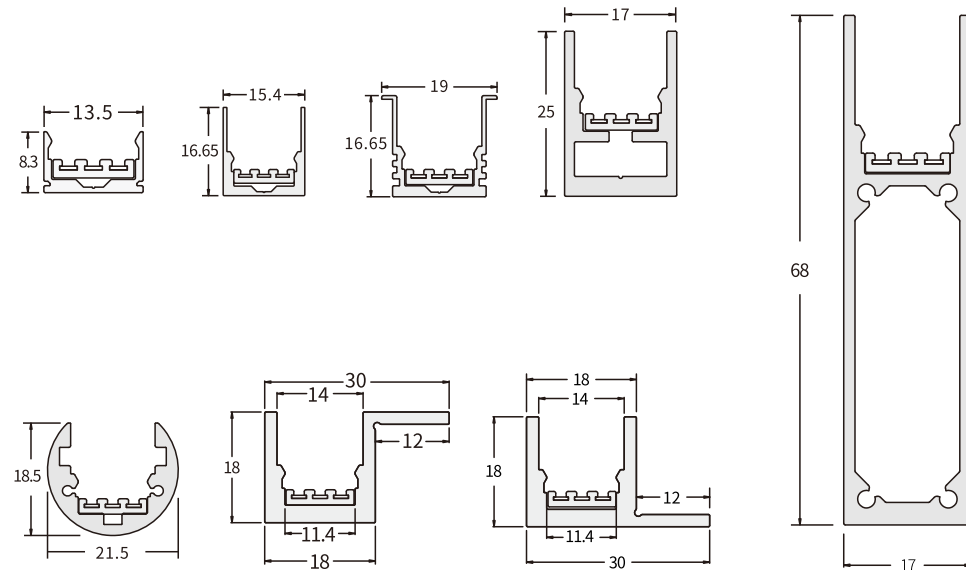

防眩光超级迷你轨道洗墙灯，
有多种不同的发光角度，
是细小空间内的理想照明

输入电压:DC24V

功率: 4W(300mm)/8W(590mm)/10W(890mm)/12W(1190mm)

颜色: 2700K/3000K/3500K/4000K/5000K/6500K


显色: Ra $\geq$ 90, $\geq$ 95

调光方式: 0-10V/PWM/DALI (可选)

发光角度: 15°/20°/25°/35°/50°

工作温度: 0~45°C


我们建议最大连接功率不超过100W

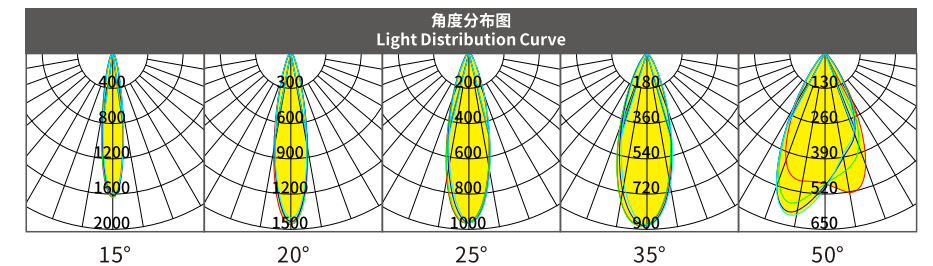


Track Optic Lisa

Mini track LED bar
with different beam angle,
Input voltage: DC24-48V
Power: 5W
Colors: 2700K/3000K/3500K/4000K/5000K/6500K
CRI: Ra $\geq$ 90, $\geq$ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 15°/25°/35°/55°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

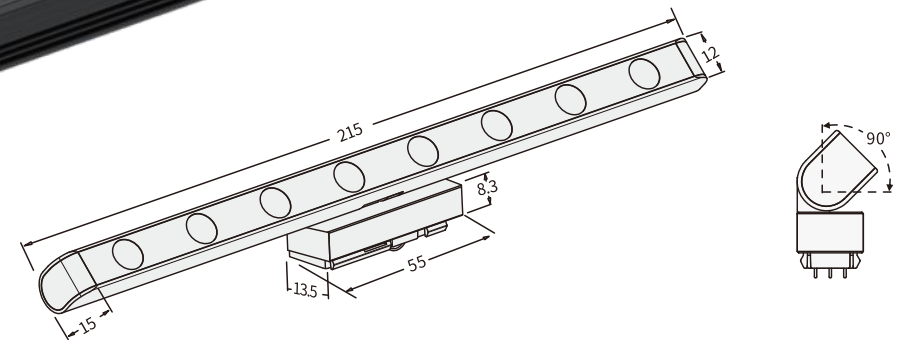

适用于以下铝槽轨道
Suit for following power track

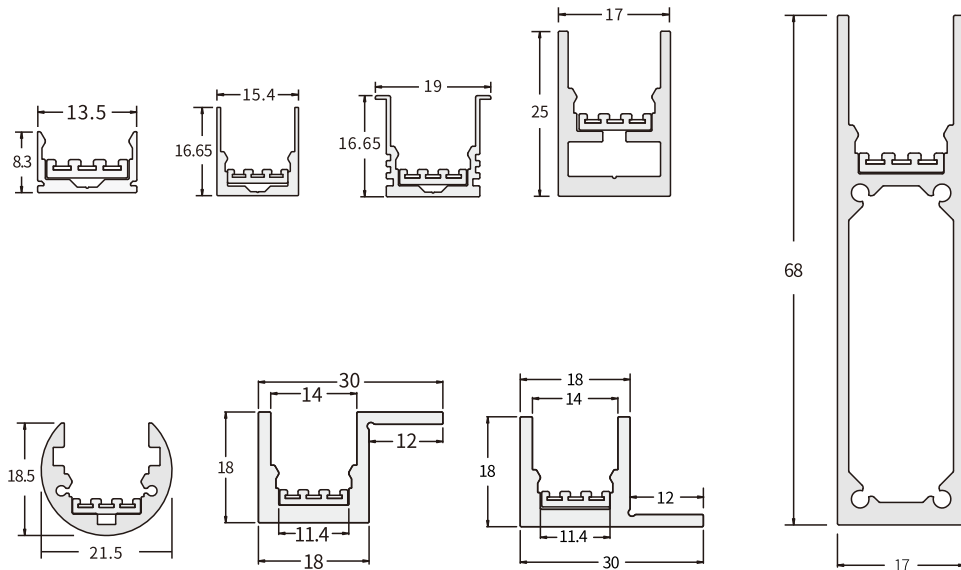

迷你轨道灯LED bar

可90度调节的灯体外壳

多种发光角度, 为您的商品增光添彩

输入电压: DC24-48V

功率: 5W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K


显色: Ra $\geq$ 90, $\geq$ 95

调光方式: 0-10V/PWM/DALI(可选)

发光角度: 15°/25°/35°/55°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

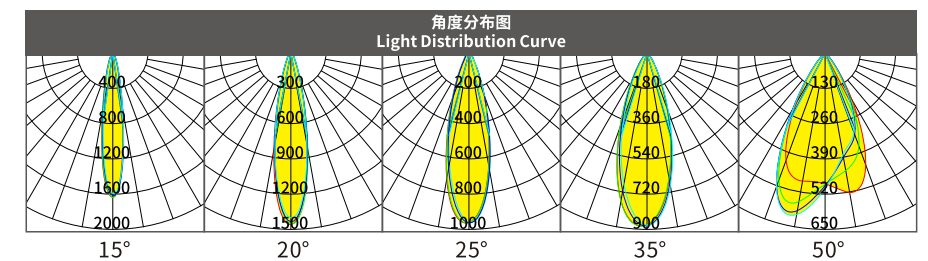


Track Spot Mini 1




Ultra mini track spot light
with different beam angle,
Anti-glare design
Input voltage: DC24-48V
Power: 1.2W
Colors: 2700K/3000K/3500K/4000K/5000K/6500K
CRI: $R_a \geq 90$, ≥ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle $R_a \geq 90$: 20°/35°/50°
 $R_a \geq 95$: 15°/30°/40°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

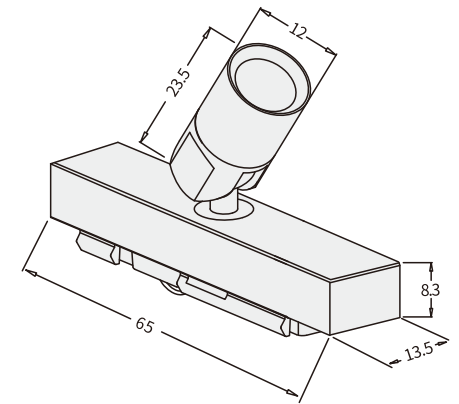


适用于以下铝槽轨道
Suit for following power track

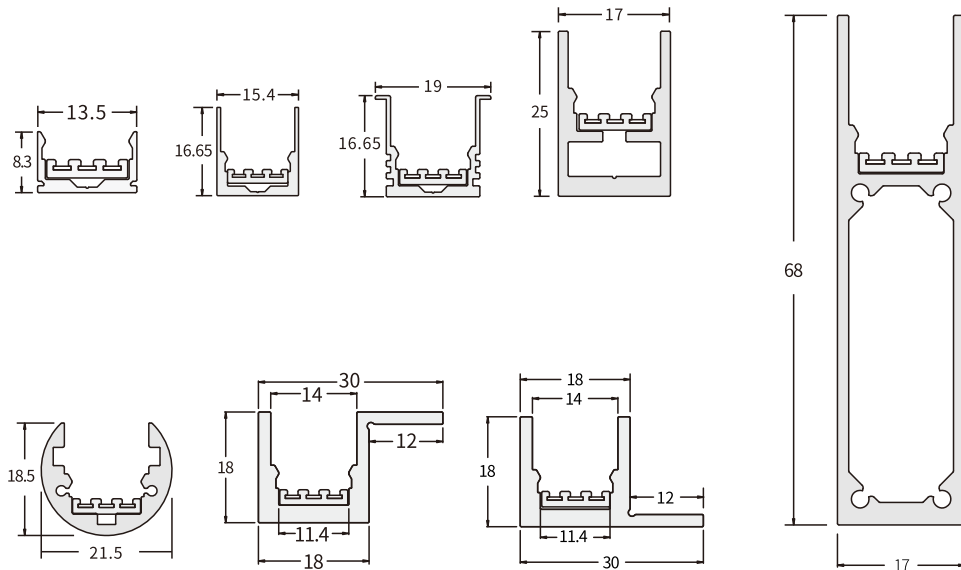

超级微型轨道射灯, 外形低调雅致
有多种不同的发光角度,
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V

功率: 1.2W
颜色: 2700K/3000K/3500K/4000K/5000K/6500K
显色: $R_a \geq 90$, ≥ 95
调光方式: 0-10V/PWM/DALI(可选)
发光角度 $R_a \geq 90$: 20°/35°/50°
 $R_a \geq 95$: 15°/30°/40°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

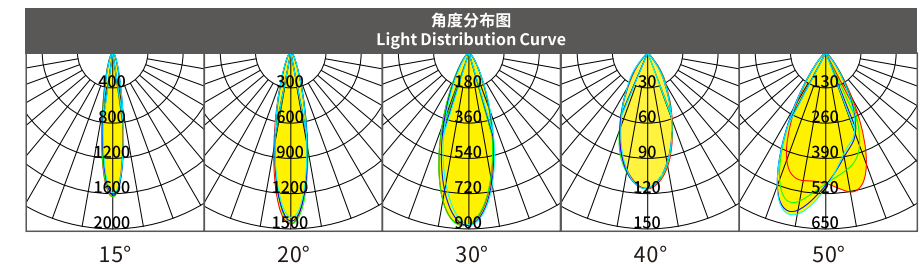

Spot Mini 2



Ultra mini track spot light
with different beam angle,
Anti-glare design

Input voltage: DC24-48V

Power: 2W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: $R_a \geq 90$, ≥ 95


Dimming: 0-10V/PWM/DALI(optional)

Beam Angle $R_a \geq 90$: 20°/35°/50°


$R_a \geq 95$: 15°/30°/40°

Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

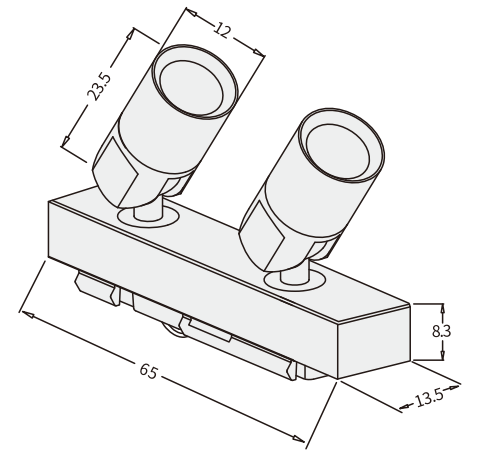

适用于以下铝槽轨道
Suit for following power track

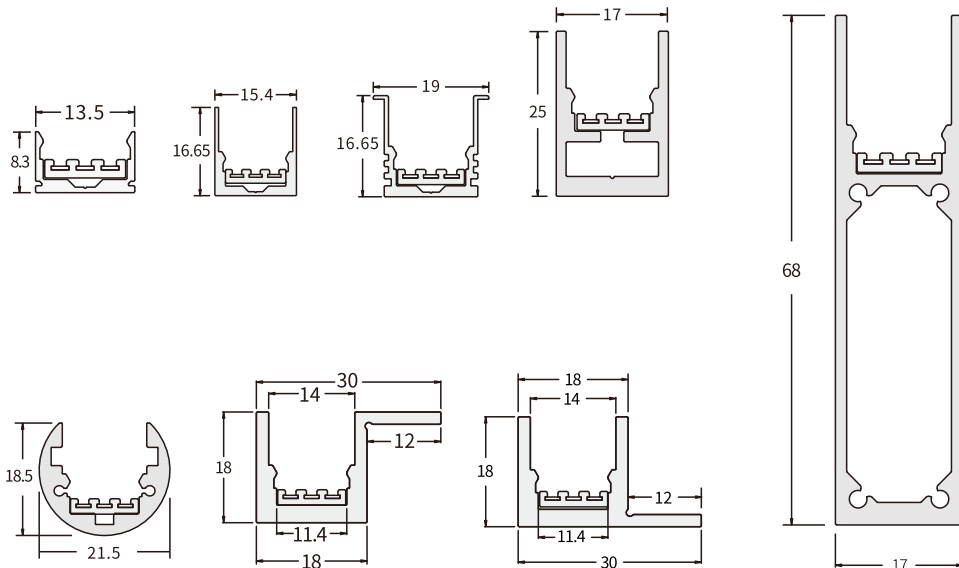

微型轨道射灯, 外形低调雅致
有多种不同的发光角度,
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V

功率: 2W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: $R_a \geq 90$, ≥ 95


调光方式: 0-10V/PWM/DALI(可选)

发光角度 $R_a \geq 90$: 20°/35°/50°

$R_a \geq 95$: 15°/30°/40°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

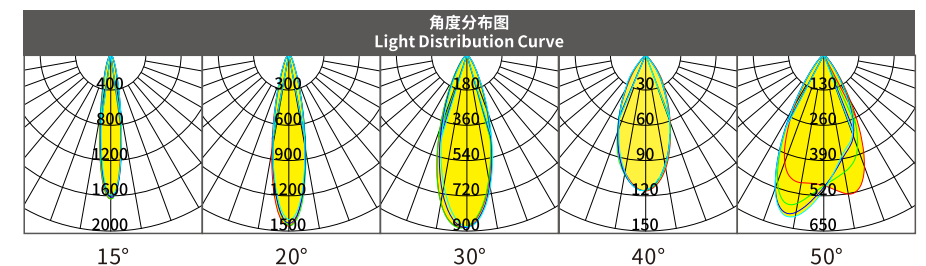

Track Spot Mido



Mini track spot light
with different beam angle,
Anti-glare design

Input voltage: DC24-48V

Power: 1.5W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: $Ra \geq 90$, ≥ 95


Dimming: 0-10V/PWM/DALI(optional)

Beam Angle $Ra \geq 90$: 15° /30°/50°


$Ra \geq 95$: 15°/25°/55°/60°

Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

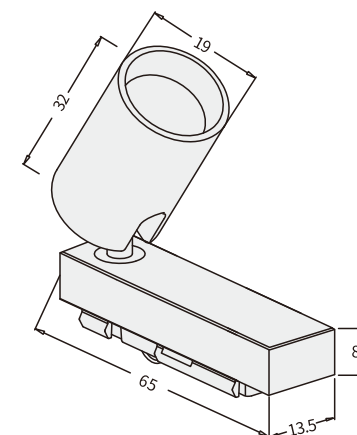

适用于以下铝槽轨道
Suit for following power track

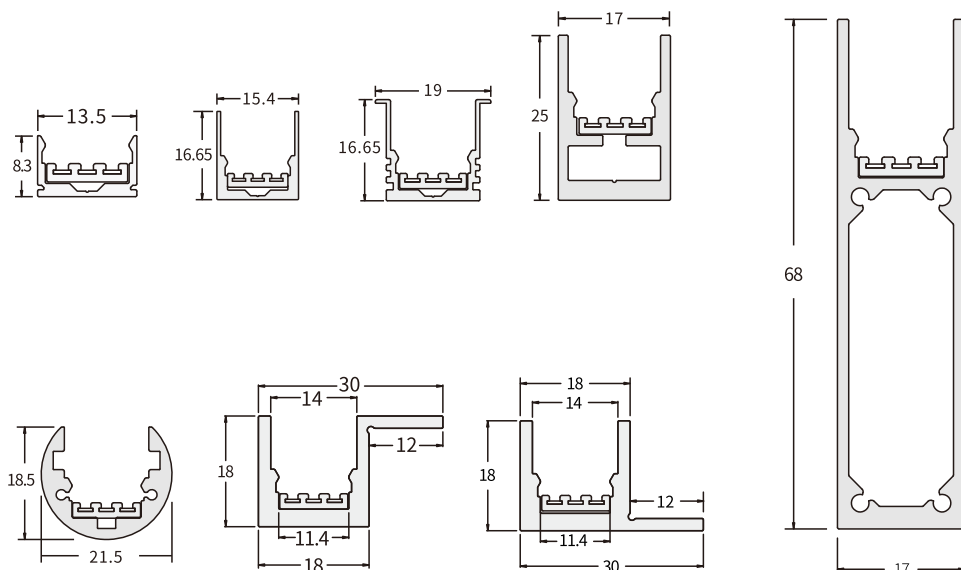

微型轨道射灯, 外形低调雅致
有多种不同的发光角度,
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V

功率: 1.5W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: $Ra \geq 90$, ≥ 95


调光方式: 0-10V/PWM/DALI (可选)

发光角度 $Ra \geq 90$: 15° /30°/50°

$Ra \geq 95$: 15°/25°/55°/60°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

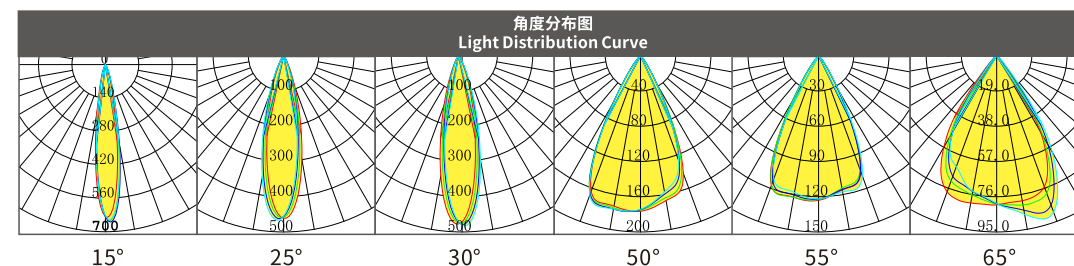

Track Spot Mina

mini track spot light

with different beam angle, Anti-glare design

an ideal product for display and museum lighting

Input voltage: DC24-48V

Power: 2W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: $R_a \geq 90$, ≥ 95

Dimming: 0-10V/PWM/DALI(optional)


Beam Angle $R_a \geq 90$: 15°/30°/50°

$R_a \geq 95$: 15°/25°/55°/60°


Working temperature: 0~45°C

we suggest maximum connected power

not more than 100W

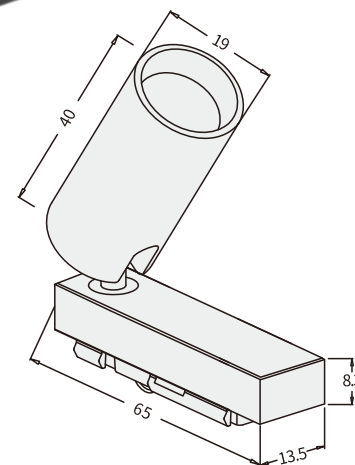

适用于以下铝槽轨道
Suit for following power track

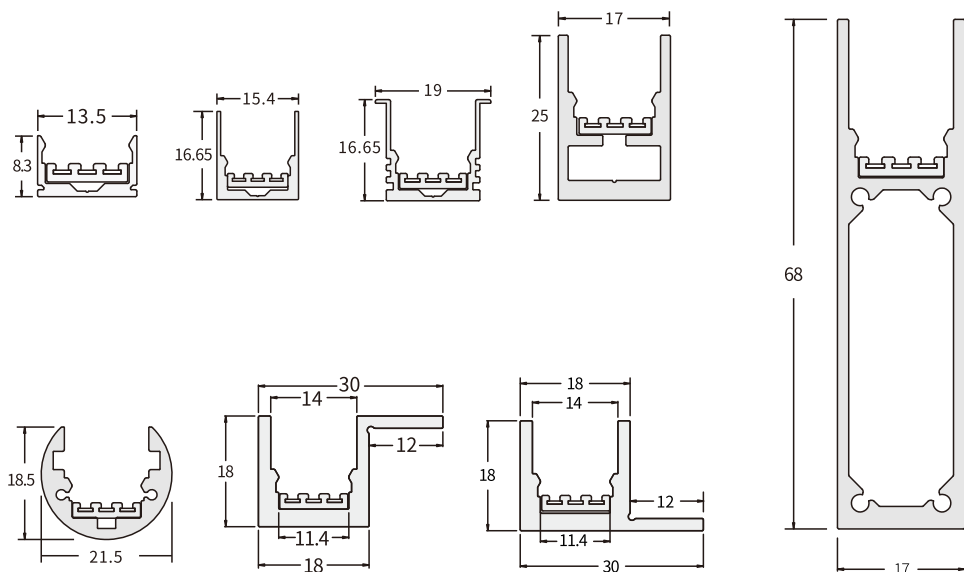

微型轨道射灯, 外形低调雅致

有多种不同的发光角度,

可选择单灯手动开关调光控制,

是博物馆, 高端展示柜的理想照明产品

输入电压: DC24-48V

功率: 2W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: $R_a \geq 90$, ≥ 95


调光方式: 0-10V/PWM/DALI (可选)

发光角度 $R_a \geq 90$: 15°/30°/50°


$R_a \geq 95$: 15°/25°/55°/60°

工作温度: 0~45°C

我们建议最大连接功率不超过100W

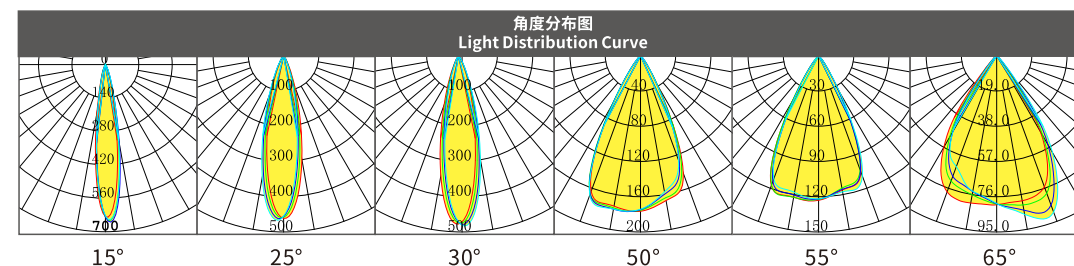

Spot Fima 2249

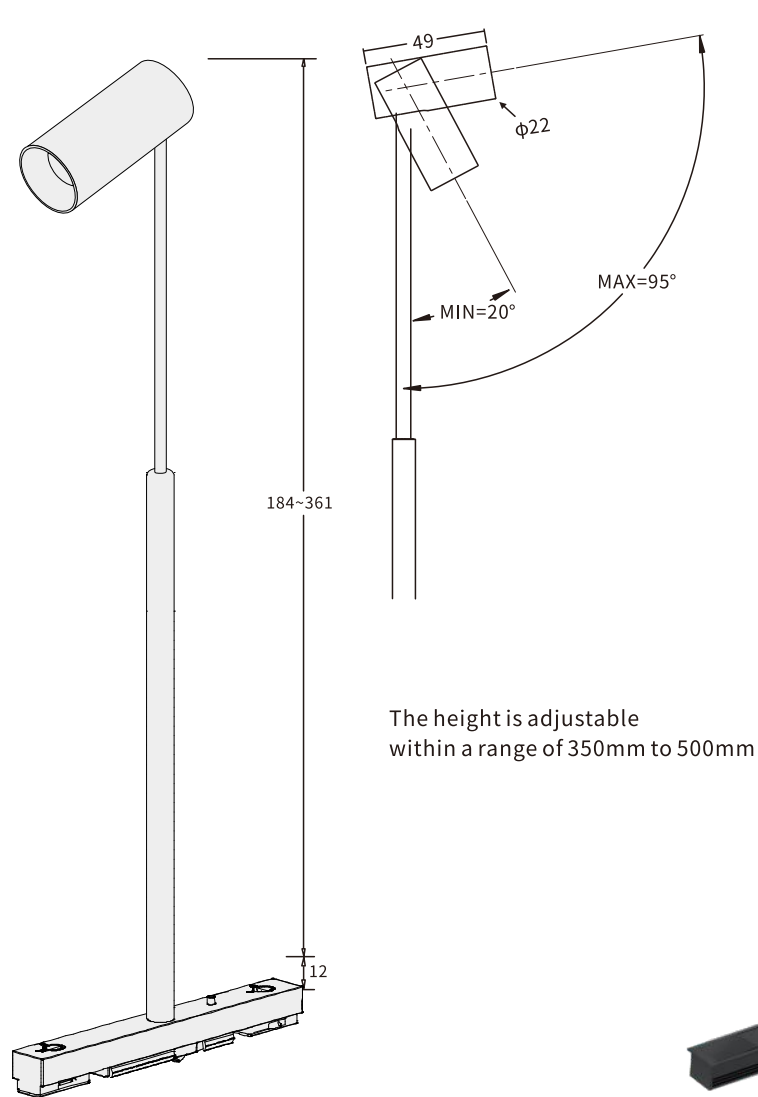


Track spotlight with different beam angles,
Designed with independent dimming switches for each light,
allowing for individual on/off control and dimming.
Input voltage: DC24V
Power: 2W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra≥90, ≥95
Beam Angle: 15° /25° /55°
Working temperature: 0~45°C
we suggest maximum connected power
not more than 100W



轨道立杆小射灯，
可根据展示柜的高度进行调整，
立杆高度可定制；
搭配独立调光开关，
可单独开关、调光，实现灵活的灯光布局
是博物馆、高端展示柜的理想照明产品。
输入电压: DC24V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra≥90, ≥95
发光角度: 15° /25° /55°
工作温度: 0~45°C
我们建议最大连接功率不超过100W

Spot Fima 2860

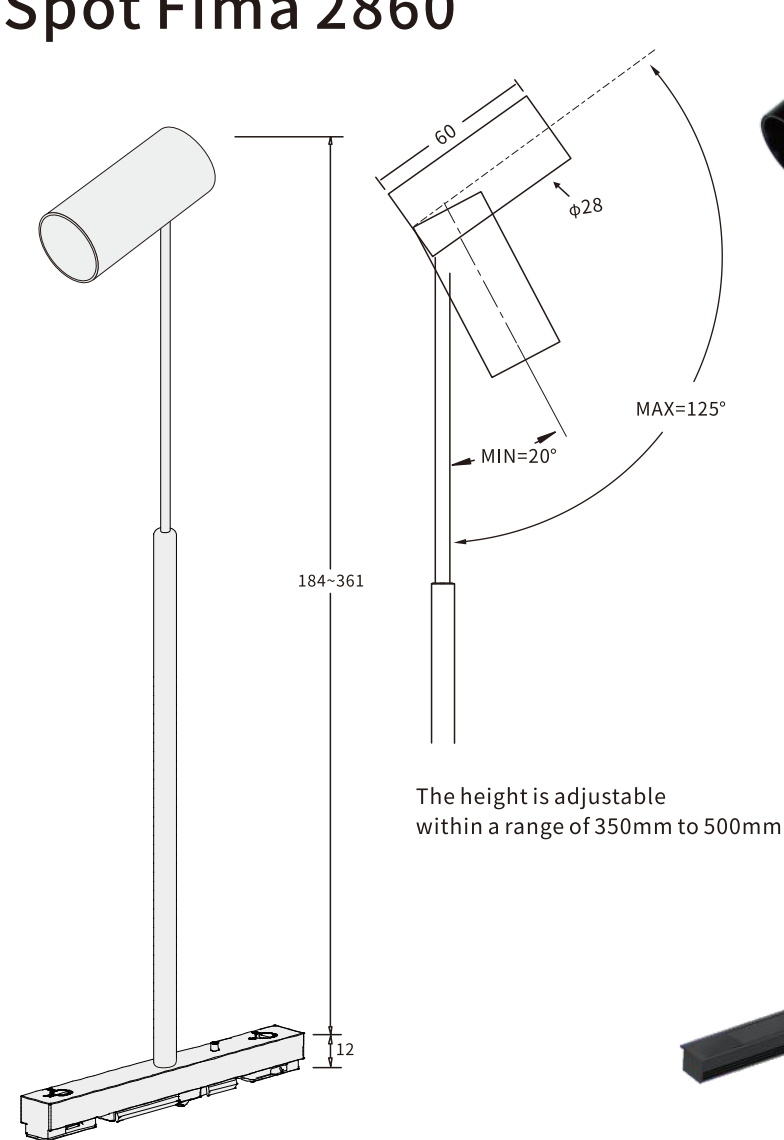

Track spotlight with different beam angles,
Designed with independent dimming switches for each light,
allowing for individual on/off control and dimming.
Input voltage: DC24V
Power: 4W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra≥90, ≥95
Beam Angle: 20° /30°
Working temperature: 0~45°C
we suggest maximum connected power
not more than 100W



轨道立杆小射灯，
可根据展示柜的高度进行调整，
立杆高度可定制，
搭配独立调光开关，
可单独开关、调光，实现灵活的灯光布局
是博物馆、高端展示柜的理想照明产品。
输入电压: DC24V
功率: 4W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra≥90, ≥95
发光角度: 20° /30°
工作温度: 0~45°C
我们建议最大连接功率不超过100W

Track Spot Mika 4240



Track spot light
with different beam angle, Anti-glare design
an ideal product for display and museum lighting
Input voltage: DC24-48V

Power: 4W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: $R_a \geq 90$, ≥ 95


Dimming: 0-10V/PWM/DALI (optional)

Beam Angle $R_a \geq 90$: 14°/22°/60°



$R_a \geq 95$: 14°/22°/30°

Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

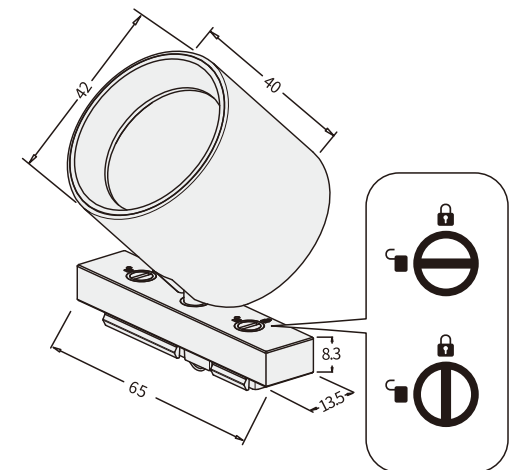

适用于以下铝槽轨道
Suit for following power track

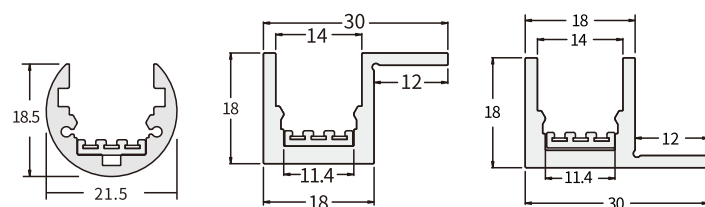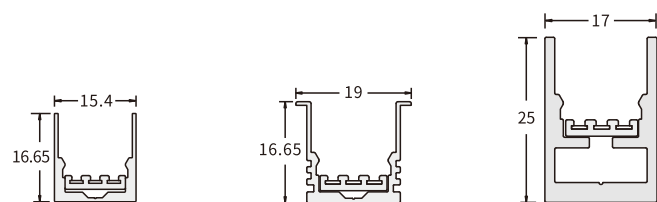

低压轨道射灯, 低调雅致的灯体设计
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V
功率: 4W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: $R_a \geq 90$, ≥ 95

调光方式: 0-10V/PWM/DALI (可选)


发光角度 $R_a \geq 90$: 14°/22°/60°

$R_a \geq 95$: 14°/22°/30°

工作温度: 0~45°C

Please lock the lamp after it is installed on the track

我们建议最大连接功率不超过100W

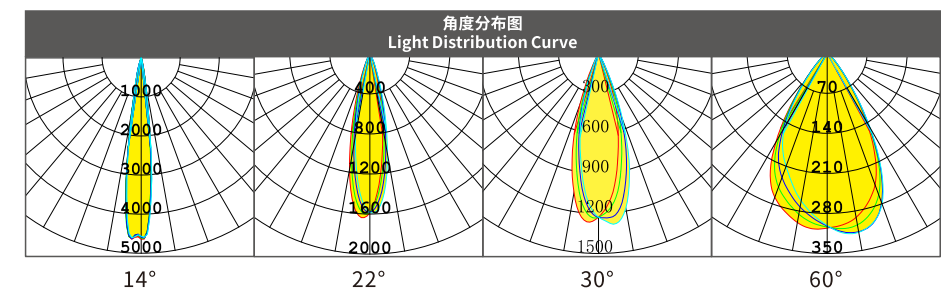

Track Spot Mika 4255

Track spot light

with different beam angle, Anti-glare design

an ideal product for display and museum lighting

Input voltage: DC24-48V

Power: 5W

Colors: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: $R_a \geq 90$, ≥ 95

Dimming: 0-10V/PWM/DALI (optional)

Beam Angle $R_a \geq 90$: $14^\circ / 22^\circ / 60^\circ$

$R_a \geq 95$: $14^\circ / 22^\circ / 30^\circ$




Working temperature: $0 \sim 45^\circ\text{C}$

we suggest maximum connected power

not more than 100W

适用于以下铝槽轨道

Suit for following power track

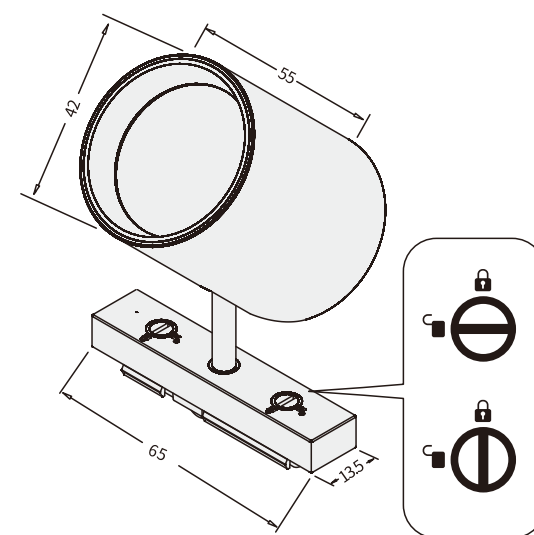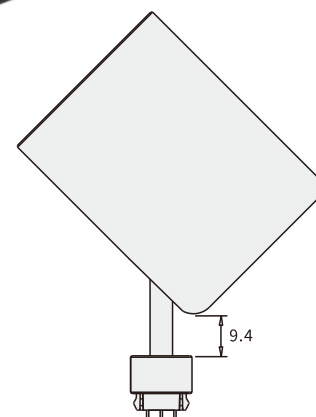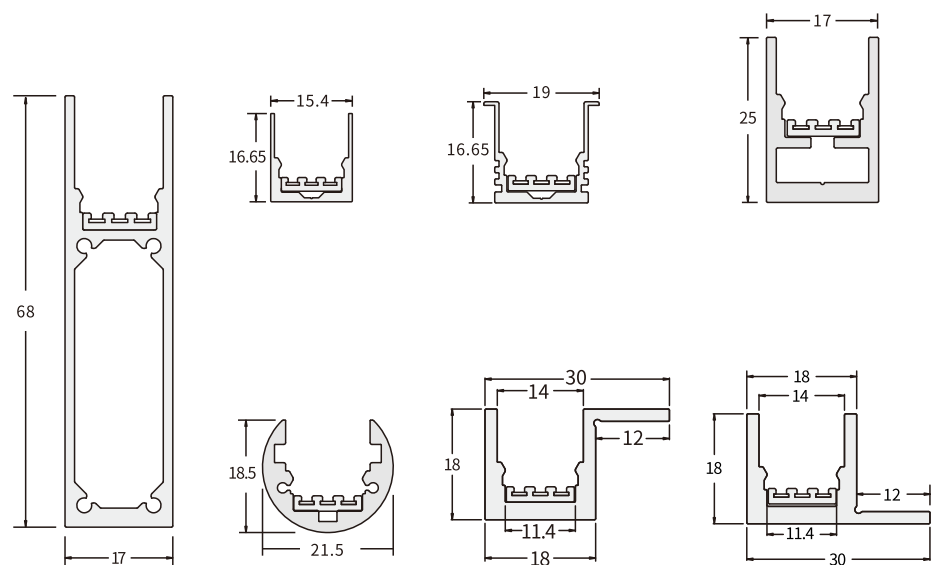

Please lock the lamp after it is installed on the track

低压轨道射灯, 低调雅致的灯体设计
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品

输入电压: DC24-48V

功率: 5W

颜色: 2700K/3000K/3500K/4000K/5000K/6500K

显色: $R_a \geq 90$, ≥ 95


调光方式: 0-10V/PWM/DALI (可选)

发光角度 $R_a \geq 90$: $14^\circ / 22^\circ / 60^\circ$

$R_a \geq 95$: $14^\circ / 22^\circ / 30^\circ$

工作温度: $0 \sim 45^\circ\text{C}$

我们建议最大连接功率不超过100W

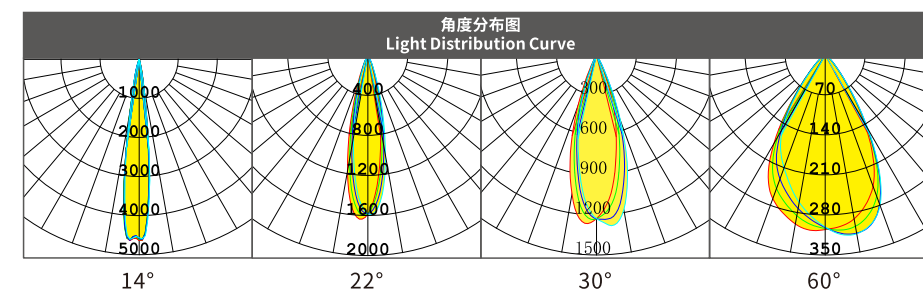


Track Spot Mika4280

Track spot light
with different beam angle, Anti-glare design
an ideal product for light up small area
Input voltage: DC24-48V
Power: 6W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: $Ra \geq 90$, ≥ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle $Ra \geq 90$: 10°/16°/25°/60°
 $Ra \geq 95$: 16°/20°/25°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W


适用于以下铝槽轨道
Suit for following power track

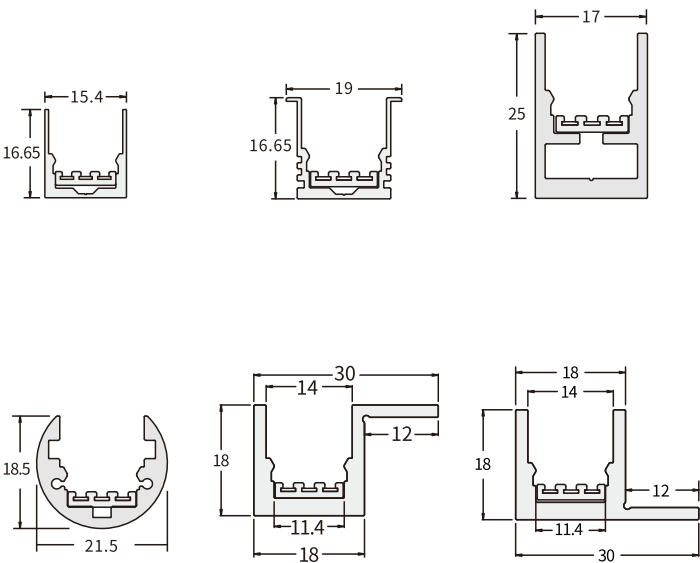

低压轨道射灯, 低调雅致的灯体设计
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V
功率: 6W
颜色: 2700K/3000K/3500K/4000K/5000K/6500K
显色: $Ra \geq 90$, ≥ 95
调光方式: 0-10V/PWM/DALI(可选)
发光角度 $Ra \geq 90$: 10°/16°/25°/60°
 $Ra \geq 95$: 16°/20°/25°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Please lock the lamp after it is installed on the track

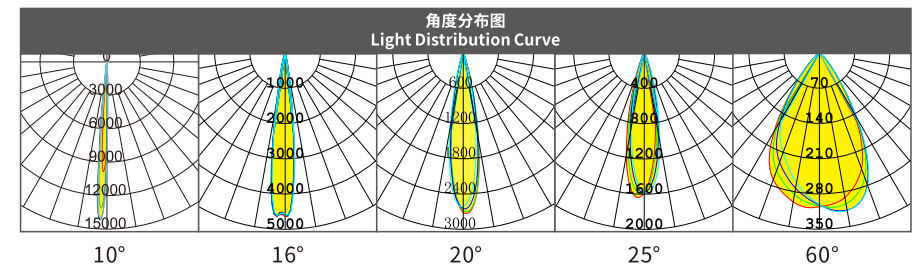



Track Zoom Spot Mika5560

Track Zoom Spot Mika5560
The beam angle is adjustable from 10-35°,
an ideal product for display and museum lighting

Input voltage: DC24-48V
Power: 6W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra≥90, ≥95
Dimming: 0-10V/PWM/DALI/Bluetooth control
Beam Angle :10°~35° adjustable
Working temperature: 0~45°C


we suggest maximum connected power
not more than 100W

适用于以下铝槽轨道
Suit for following power track

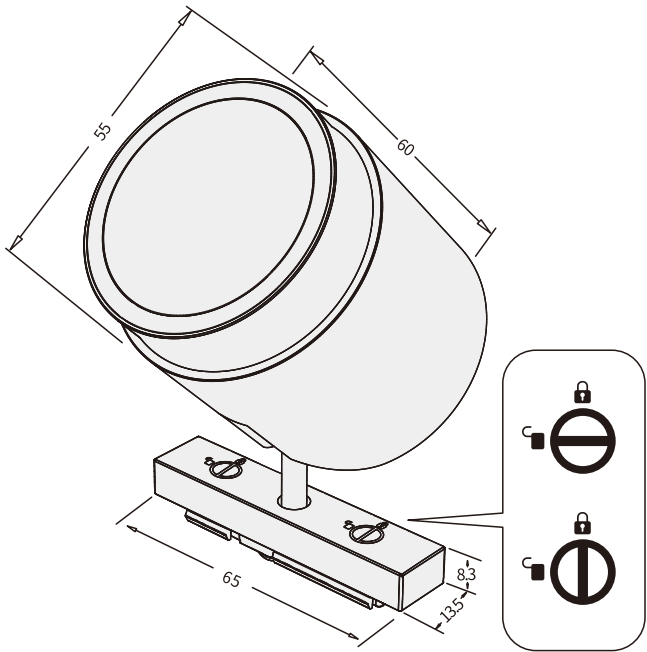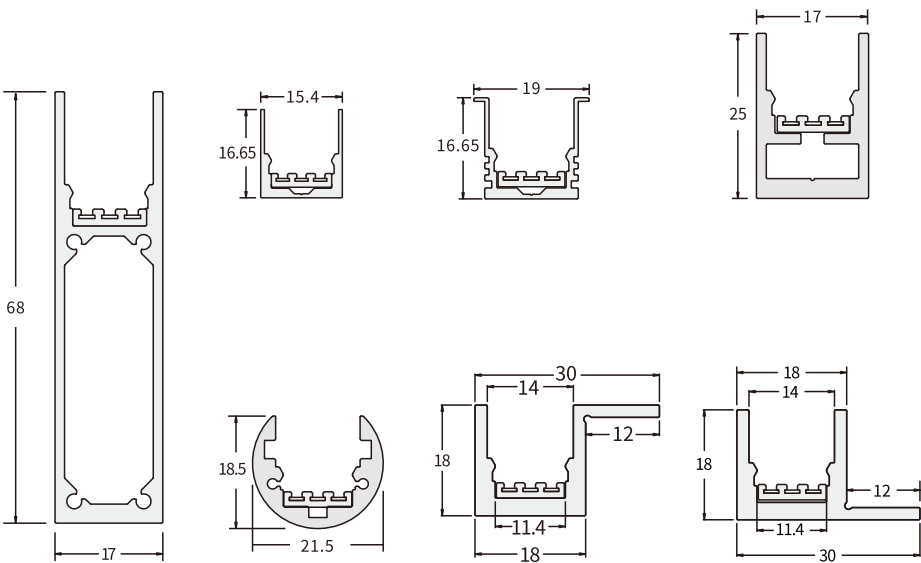

Please lock the lamp after it is installed on the track

变焦轨道射灯, 手动变焦,
通过旋转灯头轻松调节光束角度, 满足不同场景的照明需求;
适用于商业照明、家居照明博物馆照明等多种场景。
输入电压:DC24-48V
功率:6W
色温:2700K/3000K/3500K/4000K/5000K/6500K
显色指数:Ra≥90, ≥95
调光:0-10V/PWM/DALI/Bluetooth control
发光角度:10°~35°可调
工作温度:0~45°C
建议最大连接功率不超过 100W

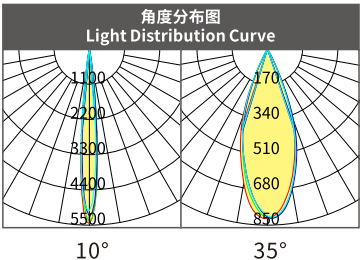

Track silicon fabric Led rope

Track silicon fabric LED rope Suitable for indoor decoration

Maximum 10 meter length

24-48V, $ra \geq 90$ or 95, Anti-glare design

Rohs/CE

Fabric material: Nylon


Fabric color: white/black/red/customized color

Customized length


低压轨道编织光带
适用于室内的装饰,
最长可做10米;
24V-48V $ra \geq 90$ 或 $ra \geq 95$,
防眩光设计;
Rohs/CE
织物材质: 尼龙
织物颜色: 白色/黑色/红色/其他定制颜色

可定制尺寸

可根据您的喜好弯曲成各种形状,
打造个性化的造型。
广泛应用于住宅、酒店、
餐厅和商业空间等各种设计项目。






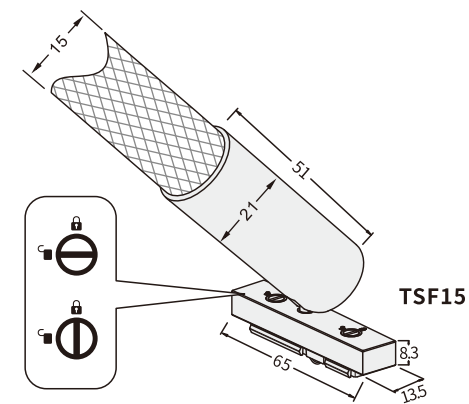


Please lock the lamp after it is installed on the track

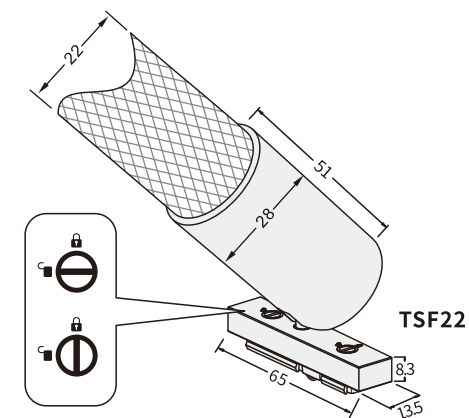

Please lock the lamp after it is installed on the track

适用于以下铝槽轨道
Suit for following power track



Bluetooth Controlled Switch

Control lights with Bluetooth.
Turn them on/off, dim them,
and connect up to 50 fixtures within 5-10 meters.

蓝牙控制器
手机连接蓝牙，打开应用程序，
轻触指尖，掌控灯光世界；
一键开关，无极调光；
灯光随心而亮，尽享个性化照明体验。
控制距离为5到10米，最多可连接50个灯具。

Single lamp control switch

On / off: push the button on the base of lamp
Dimming : push the button for a while

Application: suit for the area have high requirement
for light output, for example, museum lighting

手动单灯控制底座
开关：直接按底座上的小按钮进行开关控制
调光：底座上的小按钮，按着不放，灯光逐渐变亮，变暗。

特别适用于博物馆展示，
有些展品对亮度要求非常严格，
可以用这个单独控制进行亮度控制。

Hand wave smart switch

On/Off: wave hand softly within 10-100mm distance
from the sensor.
Dimming : keep the hand for some time
within 10-100mm distance from the sensor
Connect up to 30 fixtures

手扫感应控制
开关：在感应距离内轻轻摆动手掌进行开关控制；
调光：在感应距离内手掌保持不动，灯光逐渐变亮，变暗；
最多可连接30个灯具。



Part No. 8.026.305
24-48V 0-10V Dimming 5%-100%












10-100mm distance







型号 model	尺寸 Dimension	输入电压 Input voltage	功率 Power	颜色 Colors	显色 CRI	发光角度 beam angle
 LILY300	300mm	24V-48V	2.5W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	110°
 LINA300 (Asymmetric)	300mm	24V-48V	3W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	70°Asymmetrical
 LISA215A	215mm	24V-48V	5W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/25°/35°/55°
 LINO	300mm 590mm 890mm 1190mm	24V	4W 8W 10W 12W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/20°/25°/35°/55°
 LINO-G	300mm 590mm 890mm 1190mm	24V	4W 8W 10W 12W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/20°/25°/35°/55°
 MINI1	23.5*φ12mm	24V-48V	1.2W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	20°/35°/50°
 MINI2	23.5*φ12mm	24V-48V	2W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	20°/35°/50°
 MIDO1932	32*φ19mm	24V-48V	1.5W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/30°/50°
 MINA1940	40*φ19mm	24V-48V	2W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/30°/50°

型号 model	尺寸 Dimension	输入电压 Input voltage	功率 Power	颜色 Colors	显色 CRI	发光角度 beam angle
 FIMA 2249	49*φ22mm	24V	2W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	15°/25°/55°
 FIMA 2860	60*φ28mm	24V	4W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	20°/30°
 MIKA4240	40*φ42mm	24V-48V	4W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	14°/22°/60°
 MIKA4255	55*φ42mm	24V-48V	5W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	14°/22°/60°
 MIKA4280	80*φ42mm	24V-48V	6W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	10°/16°/25°/60°
 MIKA5560	60*φ55mm	24V-48V	6W	2700K/3000K 3500K/4000K 5000K/6500K	Ra ≥90, ≥95	10°~35°
 TSF15/TSF22	Max 10m*φ15mm (TSF15) Max 10m*φ22mm (TSF22)	24V	10W/m 14W/m	2500K/2700K 3000K/4000K 6000K	Ra ≥90, ≥95	360°

尺寸 Dimension	图片 Picture	描述 Description	编码 Part No.
		TPR03 3线轨道Track rail	1.05.500.0052
		TPR03-SC1 硅胶条Silicone cover For AL2/3/4/5/6	1.02.12.0015
		TPR03AL1 AL1铝槽外壳 Aluminium housing	1.05.500.0054 (End cap: 1.02.04.99.0042)
		TPR03AL2 AL 2铝槽外壳 Aluminium housing	1.05.500.0055 (End cap: 1.02.04.99.0040)
		TPR03AL3 AL3铝槽外壳 Aluminium housing	1.05.500.0066 (End cap: 1.02.04.99.0041)
		TPR03AL4 AL4铝槽外壳 Aluminium housing	1.05.500.0068 (End cap: 1.01.04.99.0037) Self-tapping screws: 1.01.05.0209
		TPR03AL5 AL5铝槽外壳 Aluminium housing (For MINI1, MINI2, LILY300, LINA300 & LINO)	1.05.500.0067 (End cap: 1.01.04.99.0029) Self-tapping screws: 1.01.05.0384

尺寸 Dimension	图片 Picture	描述 Description	编码 Part No.
		TPR03AL6 AL6 铝槽外壳 Aluminium housing	1.05.500.0065 (End cap: 1.02.04.99.0039)
		TPR03AL7 AL7铝槽外壳 Aluminium housing	1.05.500.0076
		TPR03AL8 AL8铝槽外壳 Aluminium housing	1.05.500.0074

图片 Picture	型号 model	描述 Description	编码 Part No.
	TPP03 电源接线端子 24V/48V power connector	最大负载 Max Power:80W 线长 cable length: 500mm 出线长度可定制 different cable length is available	8.026.076
	TPP04 电源连接端子 24V/48V join connector	最大负载 Max Power:120W 线长 cable length: 500mm 出线长度可定制 different cable length is available	8.026.177
	TPC03 连接端子 24V/48V join connector	最大负载 Max connect power: 80W 线长 cable length: 50mm 出线长度可定制 customized cable length is available	8.026.075
	TPC04 连接端子 24V/48V join connector	最大负载 Max connect power: 100W 线长 cable length: 50mm 出线长度可定制 customized cable length is available	8.026.212
	TPP07 24V-48V 手扫感应器 Hand Wave Smart	最大负载 Max Power:100W 距离 Hand ware distance: 10-100mm 功能 function: 开关/ 调光 on/off dimming	8.026.305
	SLC 手动单灯控制底座 Single lamp control switch	功能 function: 开关/ 调光 on/off dimming	
	蓝牙控制器 Bluetooth controlled switch	功能 function: 开关/ 调光 on/off dimming	

图片 Picture	型号 model	描述 Description	编码 Part No.
	Rope system for hang up (For TPR03AL4/TPR03AL5)	2 meter length	1.01.06.0065
	Rope system for hang up (For TPR03AL6)	1.5 meter length	1.01.06.0033
图片 Picture	型号 model	编码 Part No.	
	LPV-35-24 24V 35W LED power supply	1.09.04.0029	
	SLT60 24V 60W LED power supply	1.09.04.0078	
	SLT100 24V 100W LED power supply	1.09.04.0079	
	SLT150 24V 150W LED power supply	1.09.04.0080	


轨道接线示意图

Wiring Diagram For 24VDC/48VDC Track Light


Wiring




1. DALI Dimming

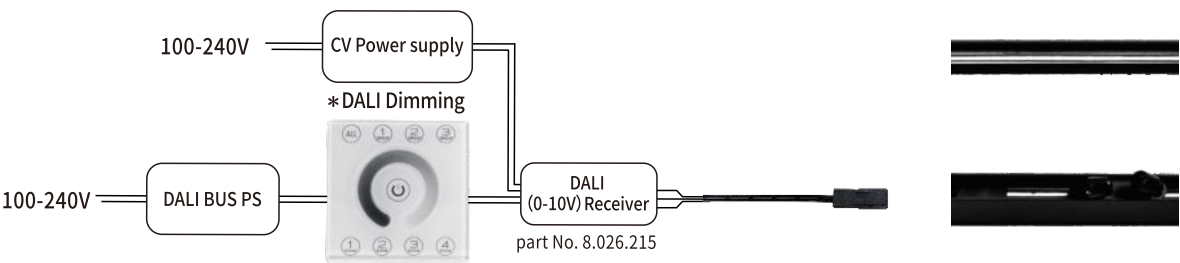





2. 0-10V Dimming

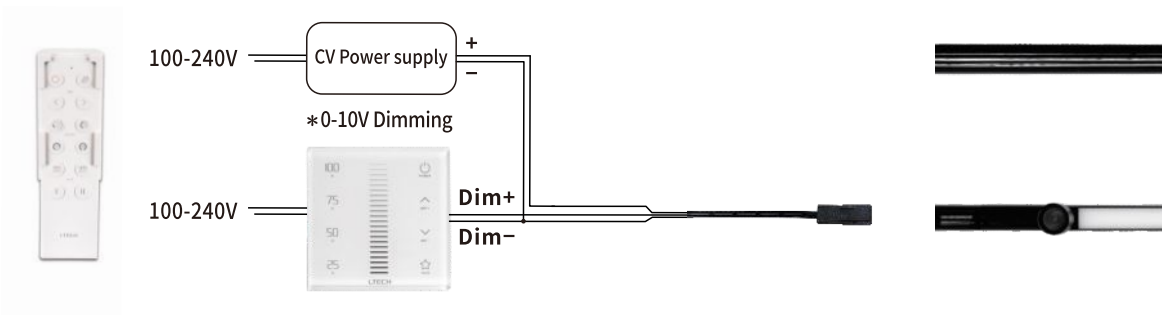


3. PWM Dimming

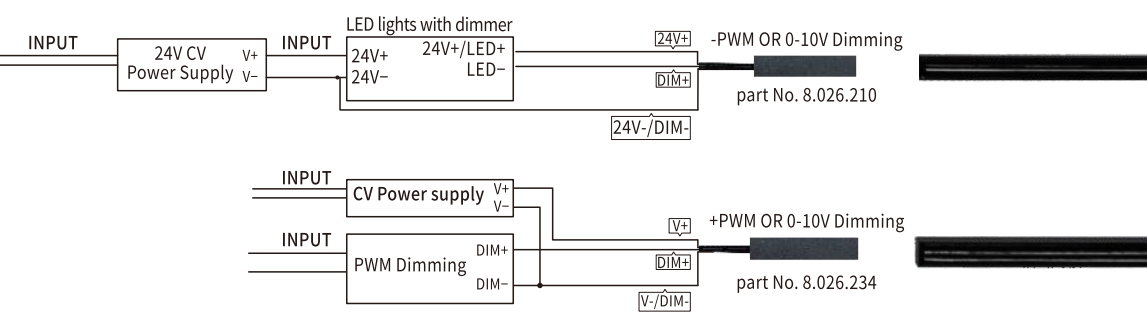

安装方式 Installation Option

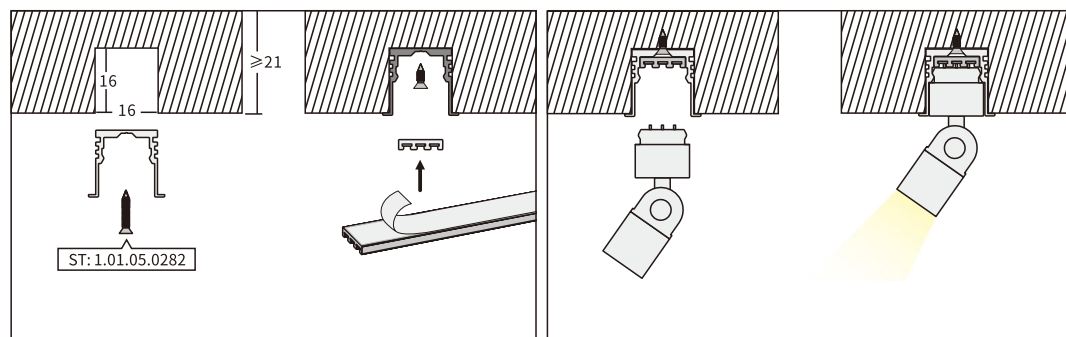


TPR03AL7


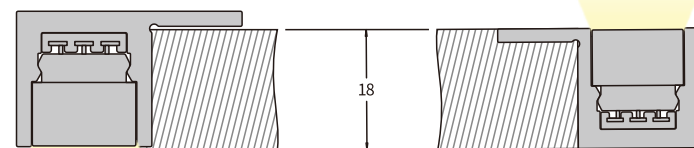


TPR03AL8


TPR03AL4

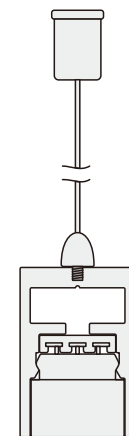

TPR03AL5

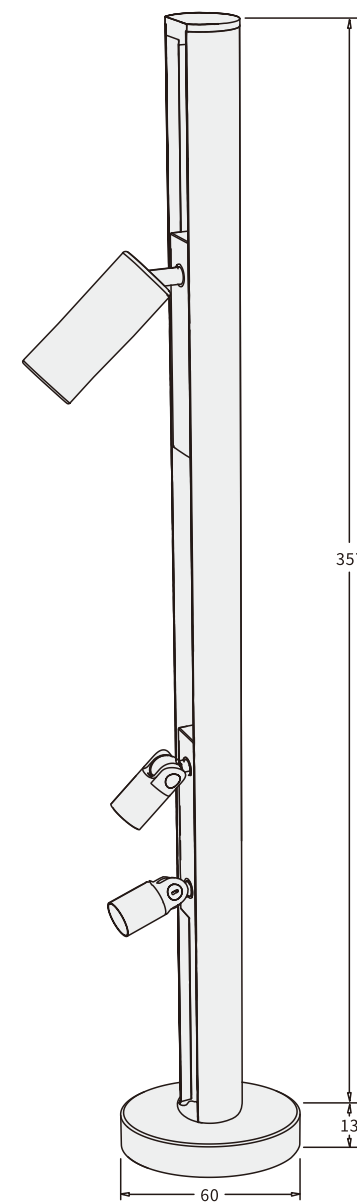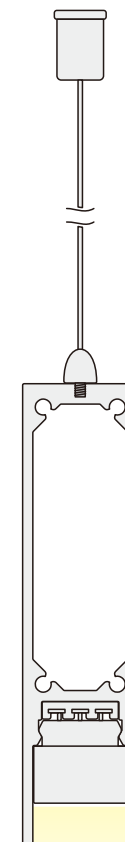

Jewelry Mini wall washer - M Lino

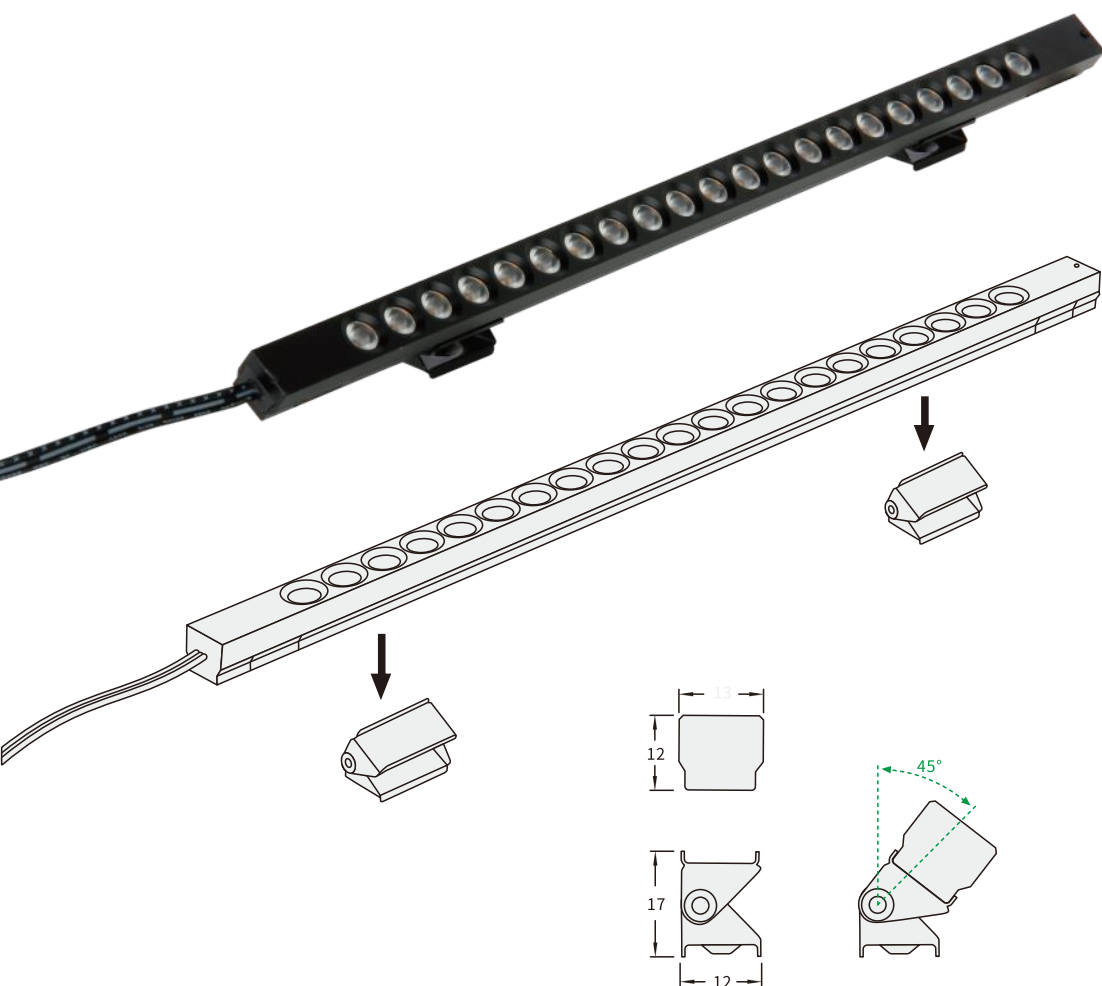

Magnetic LED Mini wall washer with different beam angle, an ideal products for display and museum lighting, different length is available on request.
Input voltage: 24VDC
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: $Ra \geq 90$, ≥ 95
Dimming: 0-10V/PWM/DALI (optional)
Beam Angle: 15° / 20° / 25° / 35° / 50°
Working temperature: 0~45°C

we suggest maximum connected power not more than 100W

低压磁吸珠宝灯, 素雅极简的灯体设计通过磁吸即可固定在卡扣上, 安装方便。不同长度可定制, 是博物馆, 高端展示柜的理想照明产品
输入电压: 24VDC
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: $Ra \geq 90$, ≥ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 15° / 20° / 25° / 35° / 50°
工作温度: 0~45°C

我们建议最大连接功率不超过100W


Jewelry Track AL6



Low voltage Jewelry light with power track with different beam angle
an ideal product for display and museum lighting
we suggest maximum connected power not more than 100W

低压立杆轨道式珠宝灯
立杆高度可以定制, 安装方便, 可配合我们的低压轨道射灯使用。
是博物馆, 高端展示柜的理想照明产品

Jewelry Spot Mini2

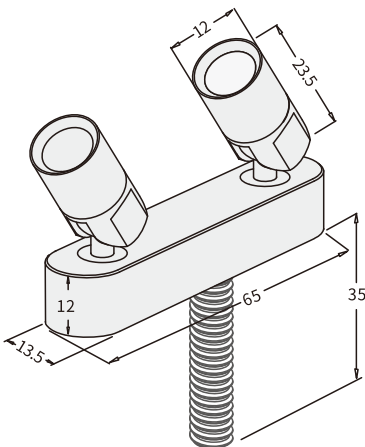


Ultra mini2 Jewelry spot light
with different beam angle
an ideal product for display and museum lighting
Input voltage: DC24-48V
Power: 2 W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra $\geq$ 90, $\geq$ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 20°/ 35°/ 50°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W


低压珠宝小射灯, 低调雅致的灯体设计
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra $\geq$ 90, $\geq$ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 20°/ 35°/ 50°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Spot Mika-W/S 4240

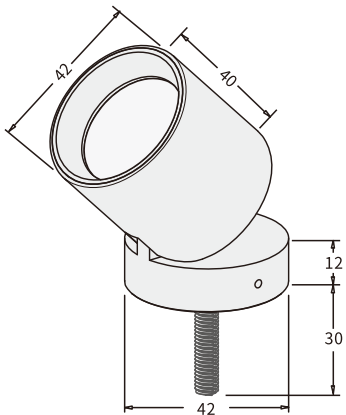

Spot Mika-W 4240

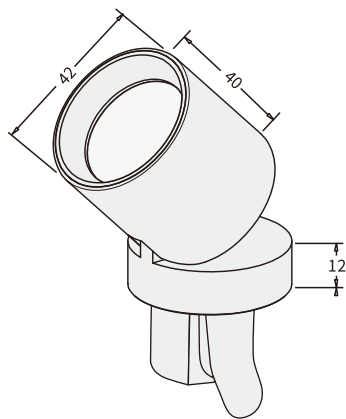

Spot MIKA-S 4240


Jewelry spot light
with different beam angle
an ideal product for display and museum lighting
Input voltage: DC24-48V
Power: 4W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra $\geq$ 90, $\geq$ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 14°/ 22°/ 60°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

低压轨道射灯, 低调雅致的灯体设计
可选择单灯手动开关调光控制,
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24-48V
功率: 4W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra $\geq$ 90, $\geq$ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 14°/ 22°/ 60°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Jewelry Spot Fiya

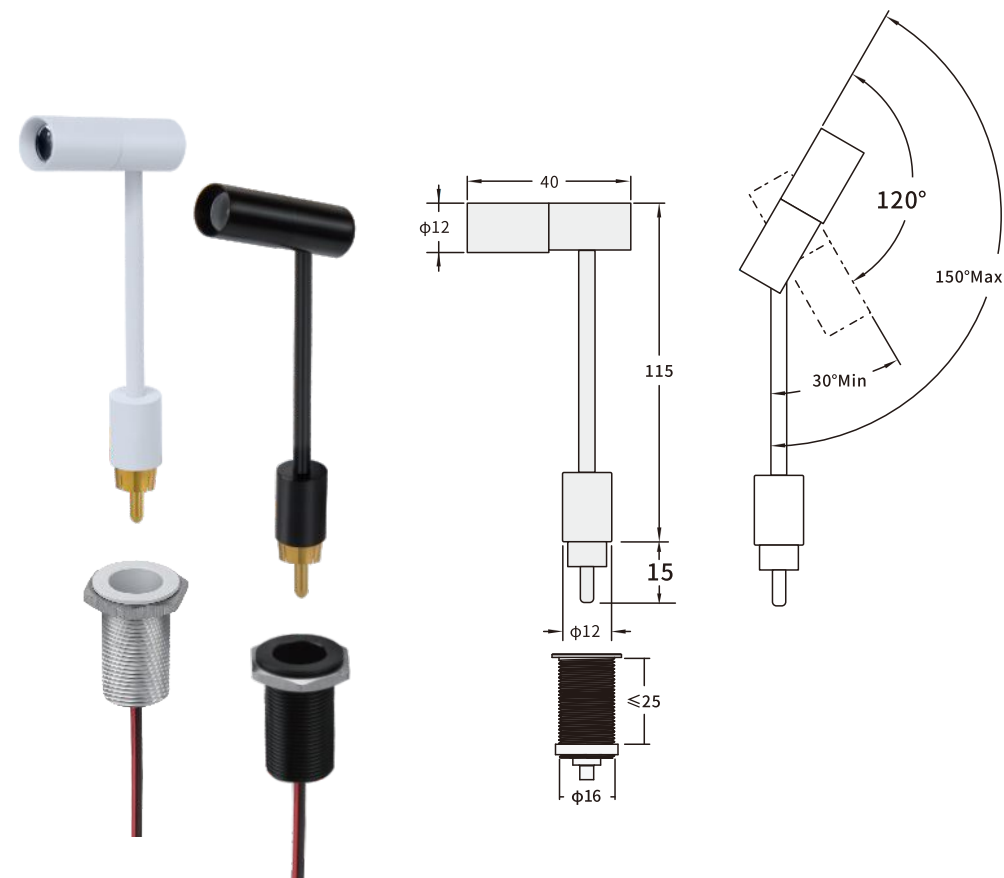


ultra mini Jewelry spot light
different beam angle, with RAC connector,
easy to install and easy to change
an ideal product for display and museum lighting
Input voltage: 24VDC
Power: 2W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra $\geq$ 90, $\geq$ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 20°/ 35°/ 50°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

低压立杆迷你直插式珠宝小射灯,
低调雅致的灯体设计
立杆高度可以定制, 安装方便
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra $\geq$ 90, $\geq$ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 20°/ 35°/ 50°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Jewelry Spot Fiya-s

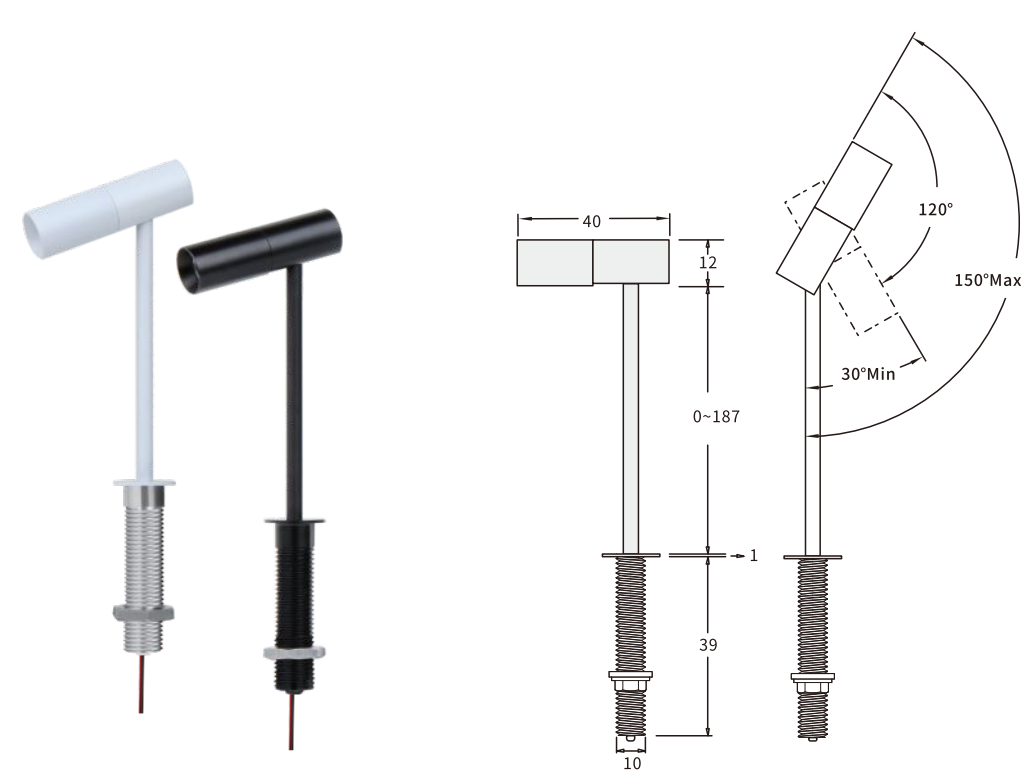


ultra mini Jewelry spot light
different beam angle, with adjustable pole
an ideal product for display and museum lighting
Input voltage: 24VDC
Power: 2W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra $\geq$ 90, $\geq$ 95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 20° / 35° / 50°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

立杆可伸缩迷你珠宝小射灯,
低调雅致的灯体设计
立杆长度可调节
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra $\geq$ 90, $\geq$ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 20° / 35° / 50°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Jewelry Spot Fima

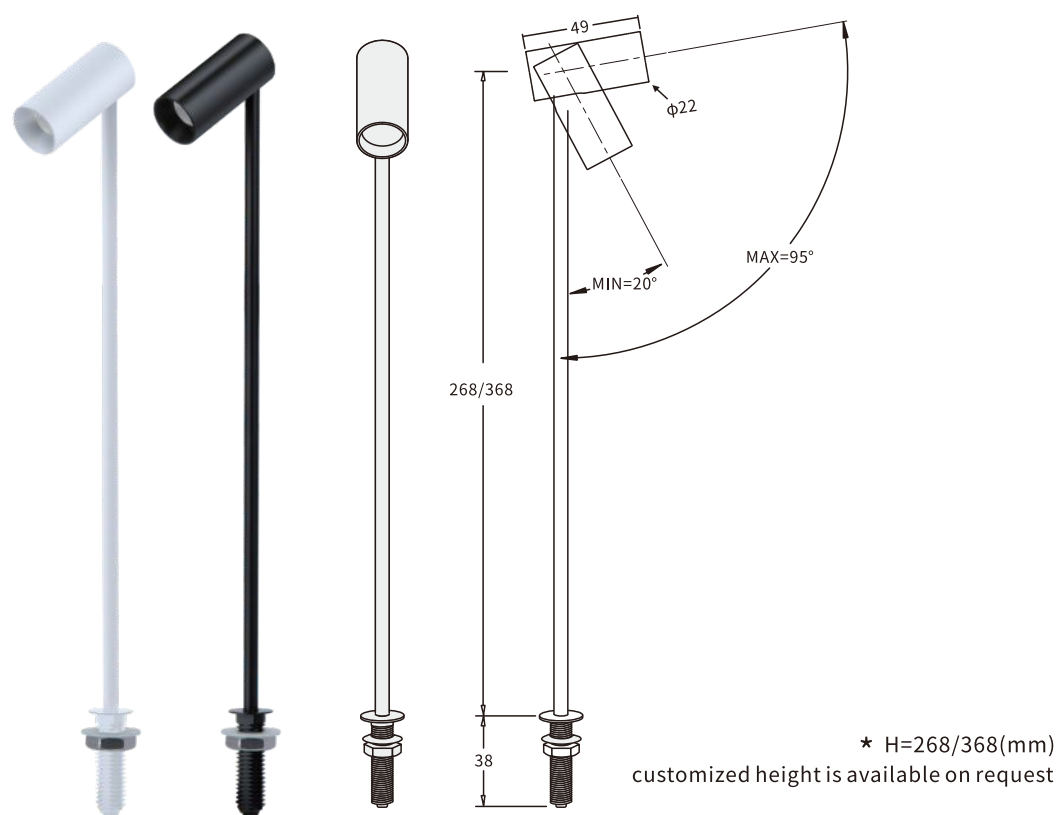


Low voltage Jewelry spot light
with different beam angle
an ideal product for display and museum lighting
Input voltage: DC24V
Power: 2W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: $R_a \geq 90$, ≥ 95
Dimming: 0-10V/PWM/DALI (optional)
Beam Angle: 15° /25° /55°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

低压立杆珠宝小射灯,
低调雅致的灯体设计
立杆高度可以定制,可调节
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: $R_a \geq 90$, ≥ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 15° /25° /55°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Jewelry Spot Fima-s

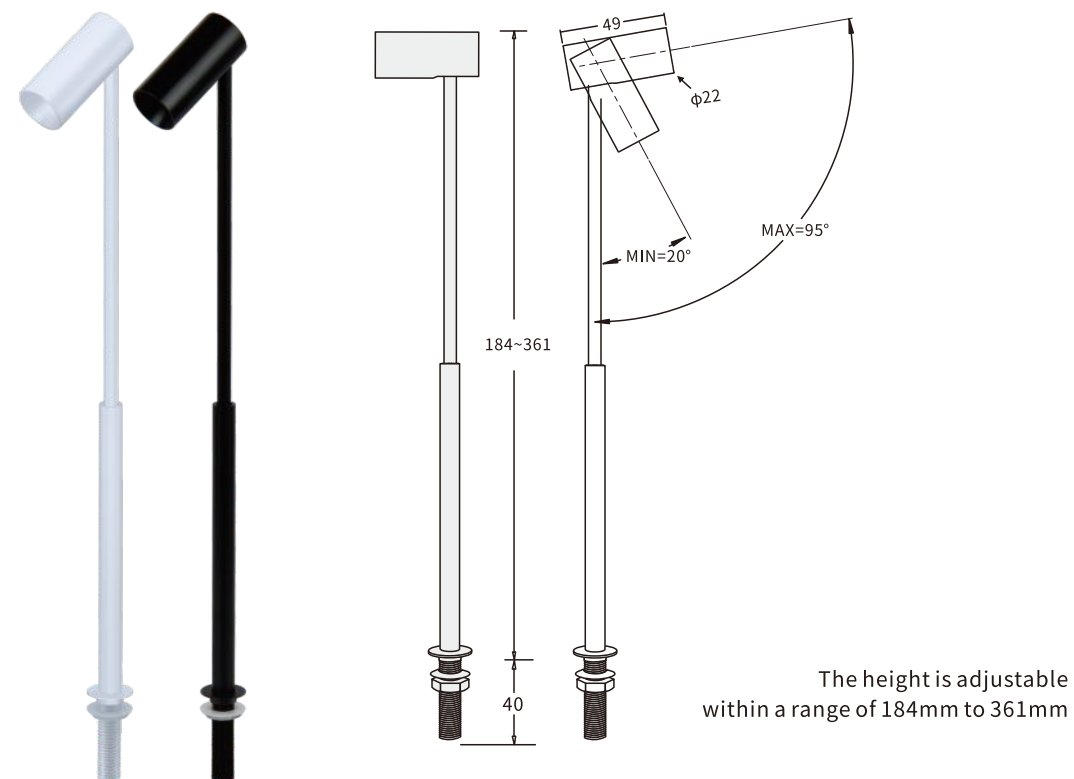

Low voltage Jewelry spot light
with different beam angle
an ideal product for display and museum lighting
Input voltage: DC24V
Power: 2W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: $R_a \geq 90$, ≥ 95
Dimming: 0-10V/PWM/DALI (optional)
Beam Angle: 15° /25° /55°
Working temperature: 0~45°C

we suggest maximum connected power
not more than 100W

低压立杆珠宝小射灯,
低调雅致的灯体设计
立杆高度可以定制,可调节
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24V
功率: 2W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: $R_a \geq 90$, ≥ 95
调光方式: 0-10V/PWM/DALI (可选)
发光角度: 15° /25° /55°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

Jewelry Optic Fika





Low voltage Jewelry light Bar
with different beam angle
an ideal product for display and museum lighting
Input voltage: DC24V
Power: 4.5W(351mm)/9W(651mm)/13.5(951mm)
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra≥90, ≥95
Dimming: 0-10V/PWM/DALI(optional)
Beam Angle: 20°/30° / 35°/ 50°
Working temperature : 0~45°C


we suggest maximum connected power
not more than 100W

低压多角度珠宝灯, 低调雅致的灯体设计
长度可以定制, 安装方便
是博物馆, 高端展示柜的理想照明产品
输入电压: DC24V
功率: 4.5W(351mm)/9W(651mm)/13.5(951mm)
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra≥90, ≥95
调光方式: 0-10V/PWM/DALI(可选)
发光角度: 20°/30° / 35°/ 50°
工作温度: 0~45°C

我们建议最大连接功率不超过100W

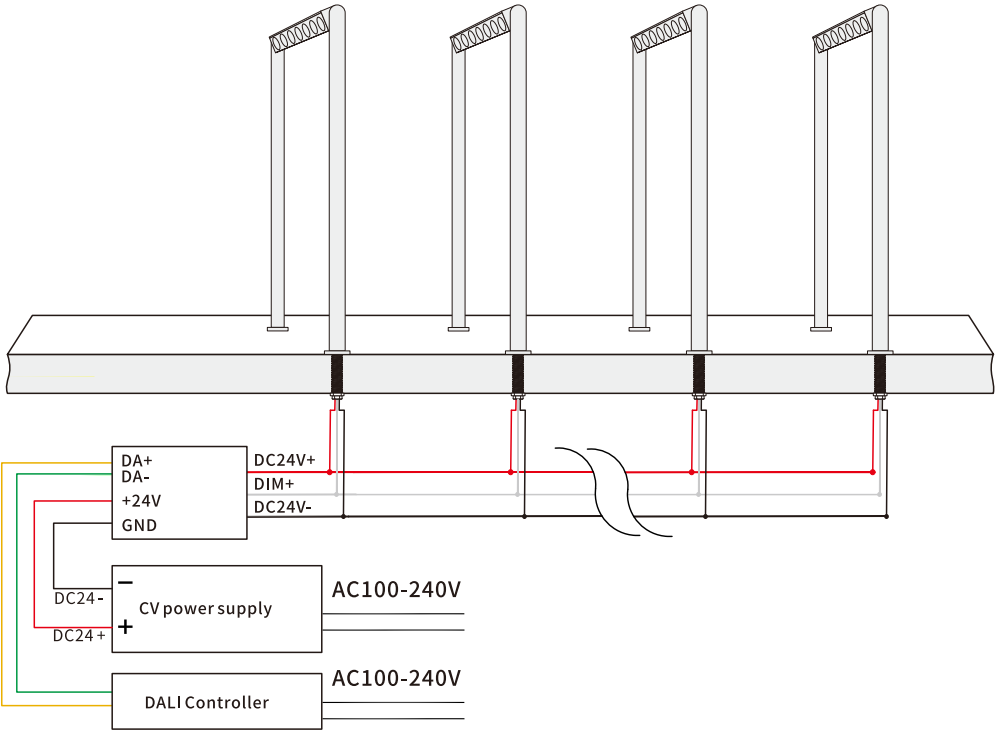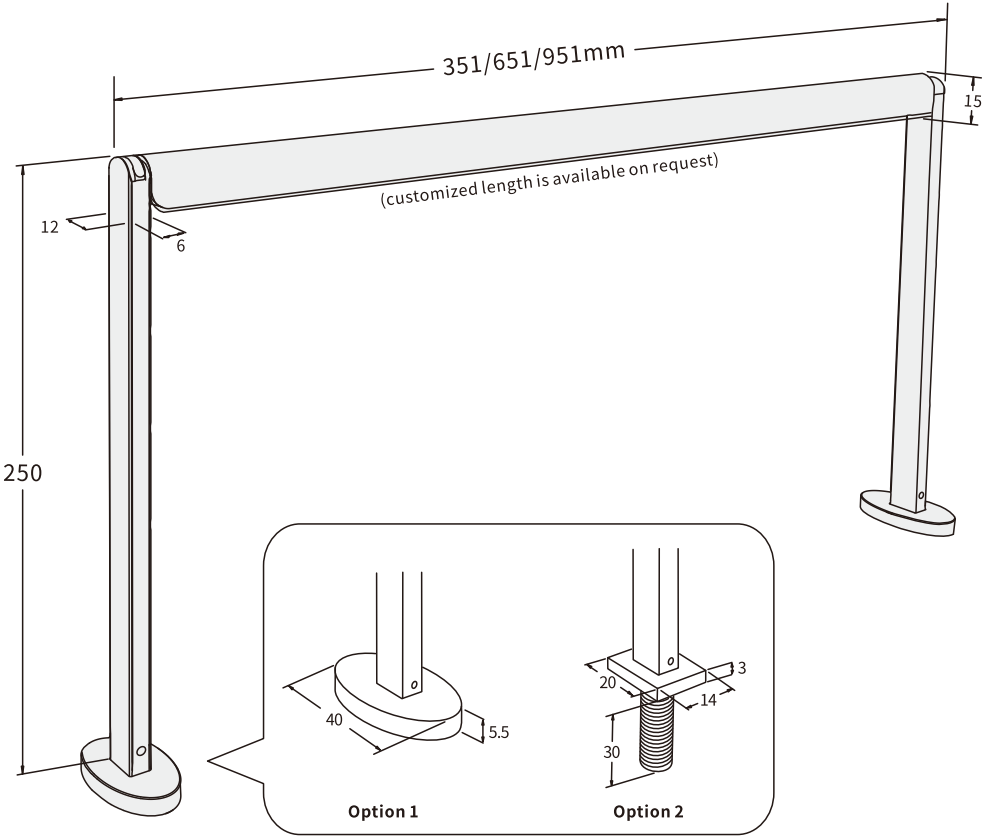

230V Drop Zoom Spot light Mika5560

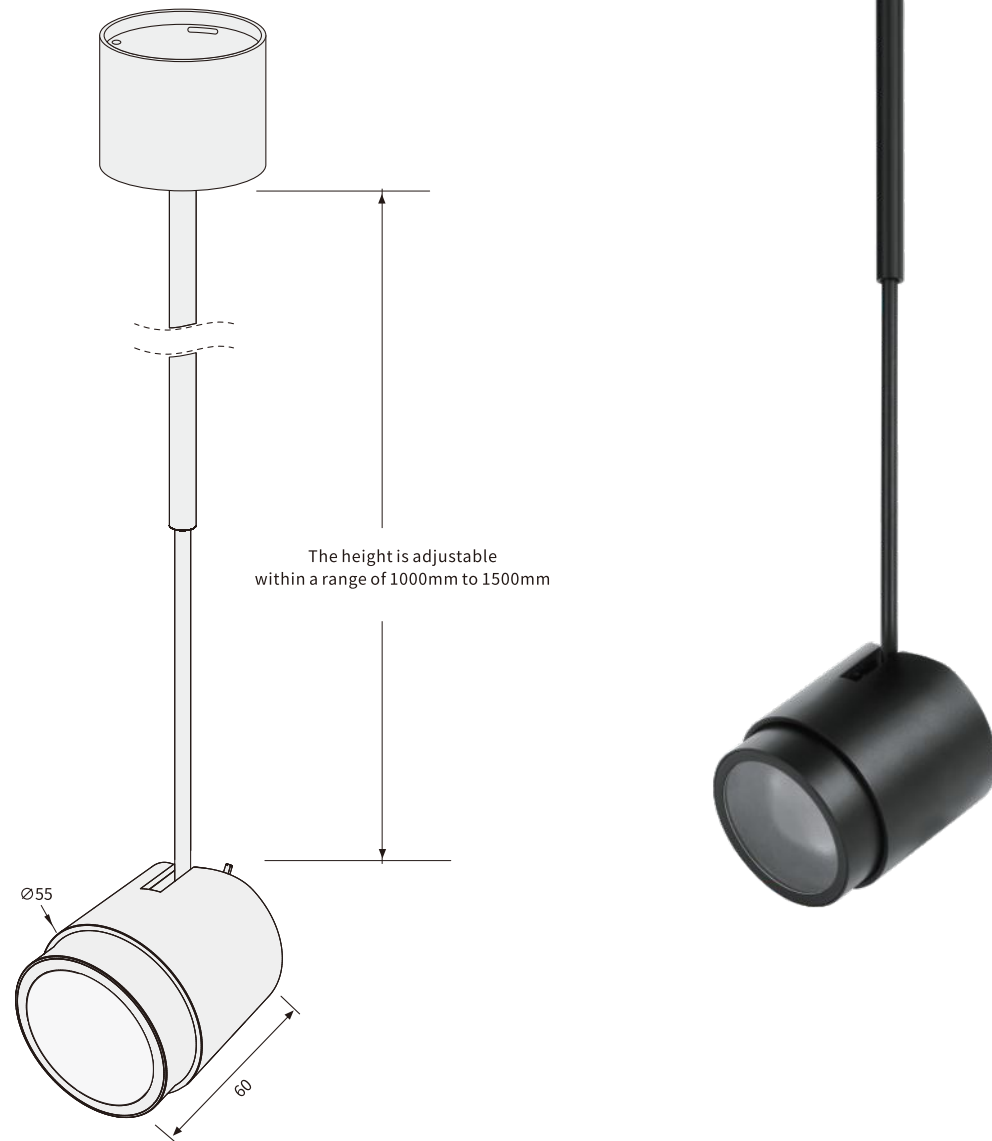


Drop Zoom Spot light Mika5560
The beam angle is adjustable from 10° to 35°.
An ideal product for display and museum lighting

Input voltage: AC230V
Power: 6W
Colors: 2700K/3000K/3500K/4000K/5000K/6500K
CRI: Ra ≥ 90, ≥ 95
Dimming: Bluetooth
Beam Angle: 10°~35° adjustable
Working temperature: 0~45°C
we suggest maximum connected power
not more than 100W

230V吊杆变焦射灯
灯杆高度可以根据客户需求定制
通过旋转灯头轻松调节光束角度,
手机APP控制一键开关,无极调光,
控制距离为5到10米;
适用于商业照明、家居照明等多种场景。
输入电压:AC230V
功率:6W
色温:2700K/3000K/3500K/4000K/5000K/6500K
显色指数:Ra ≥ 90, ≥ 95
调光:蓝牙无极调光
发光角度:10°~35°可调
工作温度:0~45°C
建议最大连接功率不超过 100W

230V Drop Spot light Mika4255

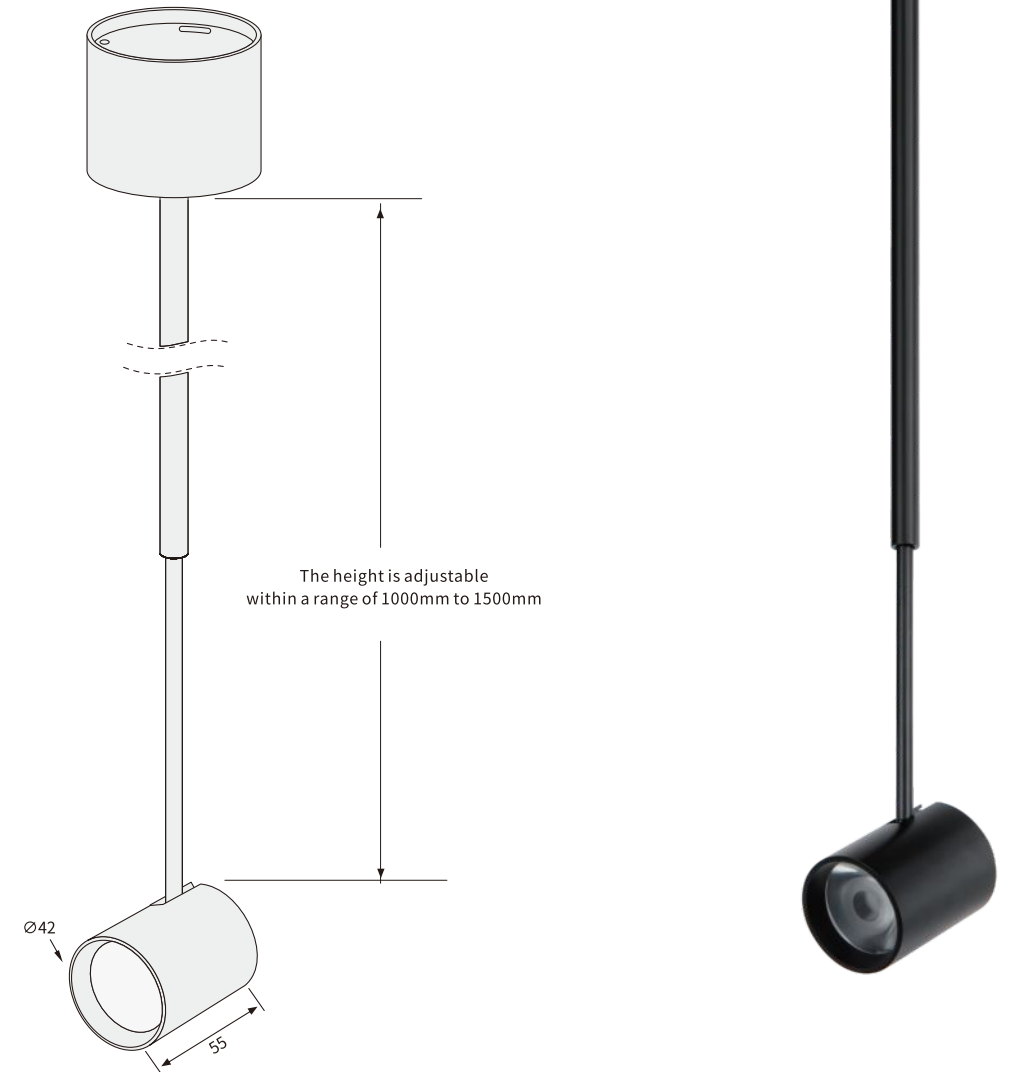

With different beam angle and adjustable pole,
An ideal product for display and museum lighting
AC: 230V
POWER: 5W
Colors: 2700K/3000K/3500K
4000K/5000K/6500K
CRI: Ra ≥ 90, ≥ 95
Dimming: blue tooth
Beam Angle: 6°/14°/22°/60°
Working temperature: 0~45°C
we suggest maximum connected power
not more than 100W

230V 高压立杆射灯, 立杆高度可定制, 可调节,
是博物馆、高端展示柜的理想照明产品
输入电压: AC230V
功率: 5W
颜色: 2700K/3000K/3500K
4000K/5000K/6500K
显色: Ra ≥ 90, ≥ 95
调光方式: 蓝牙
发光角度: 6°/14°/22°/60°
工作温度: 0~45°C
我们建议最大连接功率不超过100W